

AIR

SPACE

LAND



SEA



2023 CHASSIS & I/O BOARD SPECIFICATIONS

# RUGGED AND FLEXIBLE DAQ & CONTROL HARDWARE

AEROSPACE • ENERGY • DEFENSE



ZYNQ



THE BRICK

PANEL I/O



**NEW UEI-SAT**  
CYBERSECURITY  
AUTOMATION TOOL

**WE HAVE PRODUCT NOW**  
CALL AND ASK HOW WE CAN  
GET YOU UEI PRODUCTS FAST!

**UEIDAQ.COM**

UEI COLLECTS REAL-WORLD DATA FOR THE AEROSPACE, ENERGY AND DEFENSE INDUSTRIES, ALLOWING OUR CUSTOMERS TO BUILD SMART SYSTEMS THAT ARE RELIABLE, FLEXIBLE AND RUGGED.



508-921-4600



info@ueidaq.com

Copyright © 2023 All rights reserved. Version 01

# BUILD YOUR PERFECT SYSTEM

UEI has created a quick and easy way to build your perfect I/O system. We have identified 5 segments—chassis, processor, I/O selection, software/programming options and system enhancement—that allow you to assemble an ideal system for your application. Below is a graphical overview of each segment and what is included in the build process.

**STEP 1**  
CHOOSE  
YOUR  
CHASSIS

1



**STEP 2**  
CHOOSE  
YOUR  
PROCESSOR

2



**STEP 3**  
CHOOSE  
YOUR I/O

3



**STEP 4**  
SET UP &  
DEPLOY  
YOUR  
SYSTEM

4



NO MATTER WHICH HARDWARE YOU CHOOSE ...

**UEI HAS EVERYTHING YOU NEED TO RUN HOSTED OR EMBEDDED APPLICATIONS.**

UEI is compatible with most of today's popular operating systems, including:



[LEARN MORE ON NEXT PAGE](#)

**STEP 5**  
ENHANCE  
YOUR  
SYSTEM

5

**UEI-SAT CYBERSECURITY SOLUTIONS**

**LOCK IT DOWN!**

- NIST SP 800-213 Support
- Secure Boot, OS, Loader
- TPM Assured Security
- FIPS 140.2 Encryption
- And more!

**UEI SUPPORT SERVICES**

**RELY ON UEI!**

- Enhanced Support Packages
- Training
- 17025 Calibration
- Extended Warranties
- And more!

**ACCESSORIES**

We have all the accessories you need to complete your system.

**Cables, DIN Rails, Fans, STPs and more!**

[LEARN MORE ON NEXT PAGE](#)

# ONE I/O SYSTEM SOLUTION

UEI HAS ALL THE LIBRARIES AND CONNECTORS NEEDED FOR YOUR APPLICATIONS, INCLUDING:



**HOST LIBRARIES**



**EMBEDDED CONTROL**

PROGRAMMING SUPPORT

APPLICATION SUPPORT


C/C++



python™



UEI IoT



SIMULINK



MATLAB

iDDS

VISTAS

AND MORE!

AND MORE!

UEI data acquisition, test and control systems can help support a wide array of critical applications, such as:



Flight & Ground Simulators



Hardware-in-the-loop (HIL)



Laboratory Systems



Aerospace & Defense Test



Engine Test Stands



System Integration Labs (SIL)



Health Usage & Monitoring (HUMS)



Power Plant Sim & Test



Ground Control Systems



And more!

## UEI & FACE™


The FACE™ (Future Airborne Capability Environment) Consortium is a government/industry partnership that aims to define an open avionics environment, the FACE™ technical standard, for military avionics platforms. UEI COTS products are aligned with the FACE™ technical standard and within the FACE boundary, UEI utilizes RTI technology to participate in FACE systems via TSS—the transport services segment.



**LEARN ABOUT CONFIGURATIONS**

Next Page

# BUILD WITH FULL FLEXIBILITY

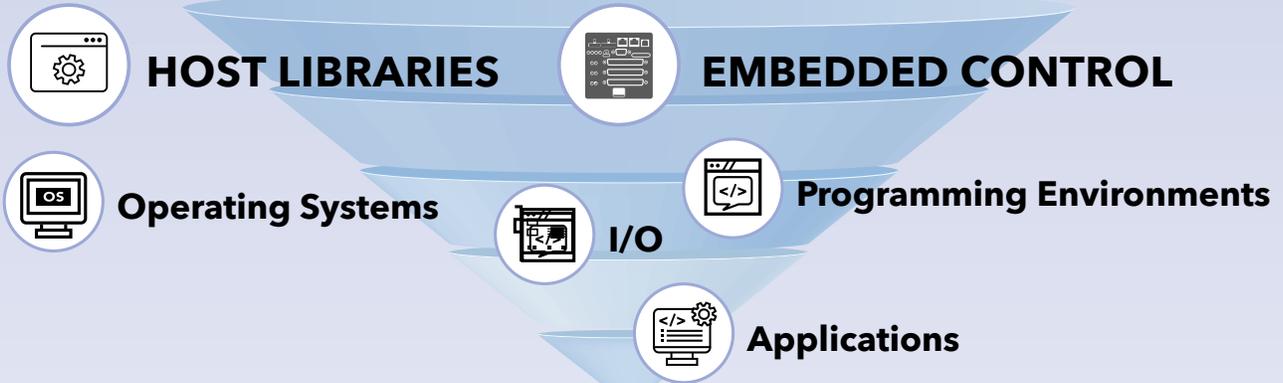


No matter how you need to build and launch your system, UEI's system flexibility gets you your perfect configuration. No matter the chassis, OS and programming, we have a deployment configuration for you.

## CONFIGURE UEI'S HARDWARE TO RUN YOUR WAY

POPULAR OPERATIONAL CONFIGURATIONS INCLUDE:

### PowerDNA Distributed Network Automation




Host libraries to support your development on any OS in almost any language. The API is the same across all, making your software design that much more portable. Synchronization via IEEE-1588 PTP as well as full control of the hardware. Example code is included to get you up and running instantly.

### Embedded Control UEIPAC



Run your application directly on our hardware, taking advantage of the rugged standalone operation. We support Realtime Linux and VxWorks directly for our entire product line. TSN and cybersecurity is all supported out of the box. Perfect for embedded control and monitoring applications.

### INTERNET OF THINGS UEI IoT



Internet of Things (IoT) is a networked system of interconnected physical objects that can share data with each other via cloud services for archiving and analysis. UEI's Linux-based PACs support Eclipse Mosquitto and Microsoft Azure.

### SIMULINK UEISIM Series



Easily run your Simulink models on real I/O. Run your models standalone or under supervisory control of the host PC. UEISIM creates a powerful solution for developing and tuning real-time (and non-real-time) applications, including model verification, rapid prototyping, and HIL testing.

### MODBUS UEIModbus Series



UEIModbus is compatible with all popular Modbus client applications and software. Communicate to your PLC over Modbus TCP using any of our I/O, and even bridge to ARINC 429.

### OPC-UA UEIOPC-UA Series



Run as a standard OPC-Unified Architecture server as defined in IEC 62541. As such, it is supported by a huge number of currently available applications packages, written in-house and by third party developers. UEIOPC-UA is an ideal solution in a wide variety of oil & gas, HVAC, machine health monitoring as well as host of other industrial control and monitoring functions. Support included for Data Access, Alarms and Historians.

### VISTAS Virtual Interoperable Simulation Tests of Avionics



VISTAS enables avionics equipment to be easily accessed, controlled, or simulated remotely through Ethernet. Our VISTAS implementation runs on virtual or hybrid test benches, improving schedules and quality while reducing overall cost. The physical hardware can be remote to the bench using VISTAS as a virtual bridge.


### iDDS Instrumentation Data Distribution Service



iDDS is an embedded common application protocol for "plug and play" DAQ instruments. iDDS allows lower cost and shorter integration cycles, because publishers/subscribers share a common framework and code is written in a common interface definition language. Our wide array of I/O and avionics boards and extensive software support make your testing safer, faster, easier and more cost-effective.

# CHASSIS OVERVIEW

## PowerDNA CUBE ARCHITECTURE

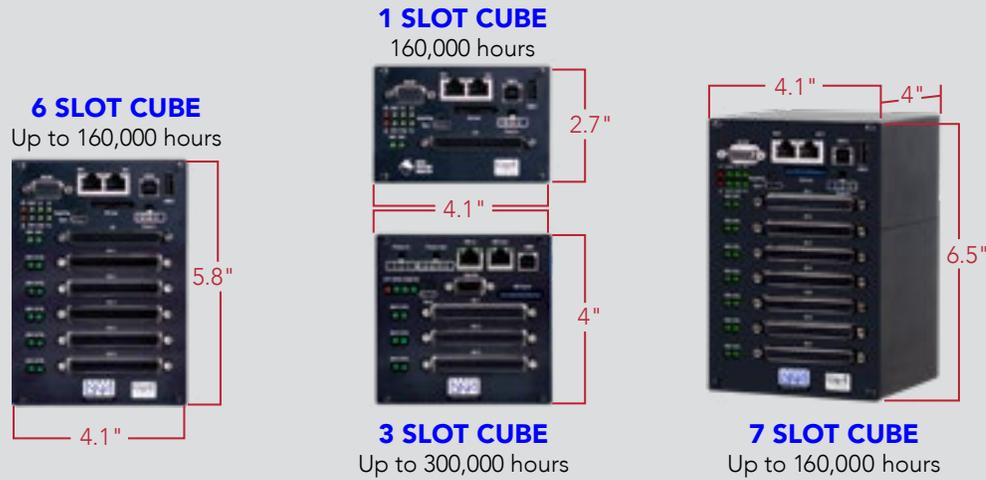

### Common Features

- 1, 3, 6 or 7 available I/O slots
- 9-36 V DC Input
- Diagnostic serial port
- SYNC port, 1588 (board-to-board and cube-to-cube)
- -40° C to 85° C
- 5g vibration, 100g shock, 120,000 ft
- SSD, encryption hardware
- LED health/status indicators
- USB
- 10/100/GigE or Fiber


THE CUBE IS THE IDEAL SOLUTION WHEN YOUR APPLICATION CALLS FOR MAXIMUM RUGGEDNESS IN THE SMALLEST POSSIBLE PACKAGE.

**Wireless Ready (GSM, CDMA, WiFi)**  
All UEI Chassis are wireless-ready, except for MIL Series. Inquire further with your UEI representative.

## PowerDNR RACKtangle® ARCHITECTURE

### Common Features

- 4, 6 or 12 I/O boards
- Passive backplane with temperature sensors
- Extensive built-in test & diagnostics
- 3g vibration, 50g shock, 70,000 ft
- -40° C to +70° C
- USB
- 2 independent GigE NICs
- SSD, encryption hardware

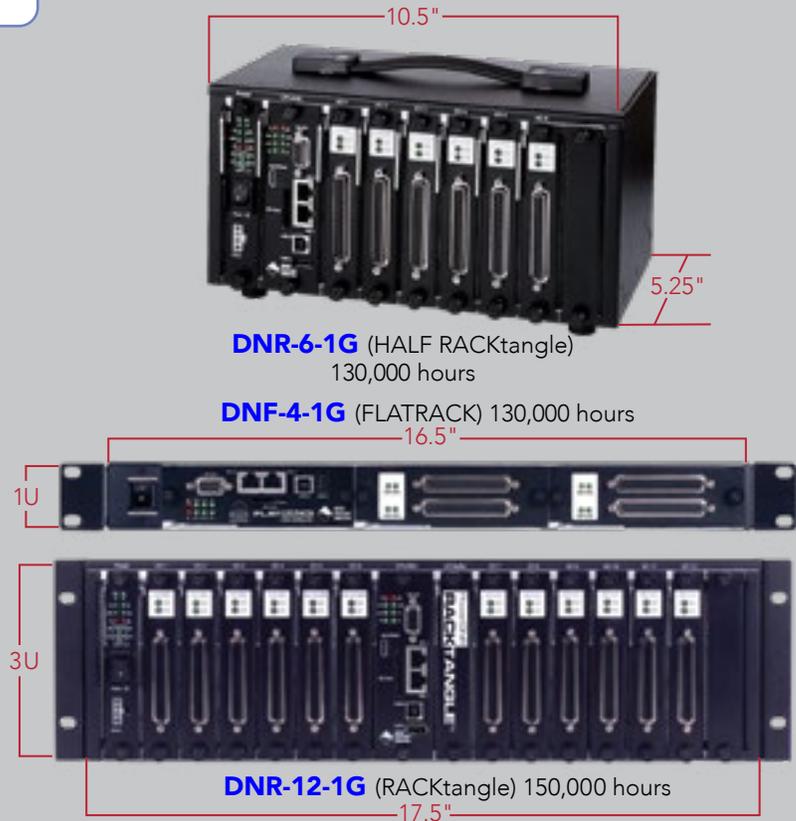

THE RACKtangle IS DESIGNED TO ALLOW YOUR SYSTEM TO BE QUICKLY & EASILY RECONFIGURED.

UEI's Cube, RACKtangle® and FLATRACK™ I/O chassis are compact and rugged data acquisition (DAQ) interfaces, ideally suited for a wide variety of industrial, military, aerospace, energy, laboratory DAQ and control applications. Each Cube/RACKtangle chassis includes a CPU, a real-time OS, Ethernet interface and slots allowing the installation of I/O boards. All our boards are compatible with all of our chassis options. With more than 90 I/O boards available, we're sure to have just what you need. UEI supports all popular Windows, Linux and Real-time operating systems. Our software suite provides a simple, universal API, and supports all common programming languages. Our Cube/RACKtangle chassis fully support an extensive array of application packages, including LabVIEW, MATLAB, Simulink and more.

Please note that PowerDNA® (Distributed Networked Automation) refers to our unique chassis. Cubes are designated with a "DNA" prefix, RACKtangles a "DNR" prefix, and FLATRACK a "DNF" prefix. UEINet™ is our single slot cube. "MIL" designates a chassis designed to meet military-grade specifications MIL-STD-704/1275/461/810.

# CHASSIS OVERVIEW CONTINUED

## Rugged/Sealed Chassis RACKtangle® ARCHITECTURE

**4-SLOT DNA-MIL**  
(MIL-CUBE)  
130,000 hours



**12-SLOT DNR-MIL**  
(MIL-RACK)  
130,000 hours



**6-SLOT DNR-MIL-6**  
(MIL-RACK)  
130,000 hours



**4-SLOT BRICK**  
(DNR-BRICK)  
130,000 hours



- Military/Rugged 38999 connectivity
- 100% COTS solution
- Supported by over 90 standard DNA series I/O boards
- 5g vibration, 100g shock, sealed to IP66
- GigE ports (control and diagnostic)
- Designed for MIL-STD-461/1275/704/810 compliance

- Extensive built-in system diagnostics
- Compatible with all PowerDNA and PowerDNR boards & software
- Extensive software support including Windows, Linux, QNX, INtime and more
- VxWorks support available in embedded or hosted configurations

## Multifunction Panel I/O Interface (UEI-PIO-1010)

40-Channel Fully Integrated I/O System

- Compact all-in-one I/O system—designed to be placed close to your signals
- Easily embed in equipment—ideal for instruments and control panels
- Integrated SoloX/i.MX ARM A9 processor
- Rugged—5g Vibe, 100g Shock, -40 °C to +85 °C
- 16 analog inputs, 2 analog outputs, 20 DIO, 2 frequency I/O, RS-232/422/485 and I<sup>2</sup>C ports
- Single board control, or distributed acquisition and control
- 100% compatible with UEI's entire product line
- Designed for Aerospace and Industrial voltage levels, up to 80 V
- Can add 2 additional boards



# PROCESSOR OVERVIEW



## 5200 Processor

- On all DNA-PPCx Cube products
- Fiber 10/100BaseT Ethernet
- Lowest power
- Same software API




## 8347 & 8347E Processors

- Available for all chassis
- 2 independent 1000BaseT Ethernet
- Options for 256 MB RAM, 128 MB Flash
- 8, 32 GByte SD cards\*
- 8, 16 GByte SSD options\*
- IEEE 1588 synchronization



## SoloX Processor

- SoloX/i.MX6 A9
- 2 independent 1000BaseT Ethernet
- RS-232, USB 2.0, HDMI, M.2 PCIe
- 1 GB RAM, 8 GByte Flash
- MicroSD to 32 GByte, SSD, M.2 SSD up to 320 GByte\*



## Zynq Ultrascale Processor

- Available on all UEIPAC systems
- Quad-core ARM Cortex-A53, 64-bit processor
- User programmable Xilinx FPGA
- 4 GByte 64-bit DDR, 8 GByte Flash
- 3 GigE ports, supports IEEE-1588
- Full HD video output
- M.2 slot for NVMe SS drives up to 512 GByte

\*The SD cards and SSD devices used are not built by UEI. As we do not control the source, we cannot offer our 10-year availability guarantee on these devices.

## CYBER SECURITY – NIST SP 800-213



### Secure Boot

- Extension of Root of Trust

### Secure OS

- STIG/NIST SP 800-213 compliance

### Secure Tools

- Security automation tools make configuration easy
- FIPS 140.2 encryption

**TPM Hardware Secured Protection**

## UEI & TIME SENSITIVE NETWORKING (TSN)

**Reliable networking capable of running critical systems reliably and deterministically**



- Zynq UltraScale+ will support 802.1Qbv, 802.1Qbu/802.3br, 802.1Qcc, 802.1AS, 802.1Q, 802.1Qav, 802.1CB (end-node)
- SoloX ARM I.MX6 will support 802.1Qav, 802.1Qbv, 802.1AS, 802.1Q, 802.1Qci (switch inside)

## SPECIFICATIONS

| Processor                     | Part Number (DNx-) | Memory                            | Connectivity   | Non-volatile Memory  | Notes                                     | MTBF     | TSN-Ready |
|-------------------------------|--------------------|-----------------------------------|--|--|---|----------|-----------|
| 5200 Power PC                 | DNA-FPPCx          | 128 MB RAM, 4 MB Flash            | Fiber 10/100Base-T, Switch                                 | SD: 8 GByte, 32 GByte  | 3.5 Watts                                 | >300,000 | -         |
| 8347 PowerPC                  | -1G-02             | 256 MB RAM, 32 MB Flash           | USB 2.0<br>2 GigE (Independent)                            | SD: 8 GByte, 32 GByte<br>SSD: 8 GByte, 16 GByte, 32 GByte                                  | 7 Watts, IEEE 1588                        | >160,000 | -         |
| Encrypted 8347                | -1G-03             | 256 MB RAM, 128 MB Flash          | USB 2.0<br>2 GigE (Independent)                            | SD: 8 GByte, 32 GByte<br>SSD: 8 GByte, 16 GByte, 32 GByte                                  | 7 Watts, IEEE 1588, Hardware Encryption   | >160,000 | -         |
| SoloX/i.MX6 Cortex A9 ARM     | -1G-11<br>-1G-12   | 1 GByte RAM, 8 GByte Flash        | 2 GigE (Independent), USB 2.0, HDMI, M.2 PCIe              | μSD: 8 GByte, 32 GByte<br>SSD: 8 GByte, 16 GByte, 32 GByte<br>M.2 SSD: 40 GByte, 320 GByte | 5 Watts, IEEE 1588, Wireless via M.2 card | >160,000 | ✓         |
| Quad Core ARM Cortex-A53 Zynq | -1G-33             | 4 GByte 64-bit DDR, 8 GByte Flash | 3 GigE (Independent), USB 3.0, Display Port (DP), M.2 PCIe | M.2 SSD: 40 GByte, 320 GByte   | 12 Watts, IEEE 1588                       | >140,000 | ✓         |
|                               | -1G-3A             | 2 GByte 64-bit DDR, 8 GByte Flash |  |  |   |          |           |

# CYBERSECURITY

## UEI & NIST SP 800-213 COMPLIANCE PATH

- 

**Secure Key Management**
- 

**Secure Boot of Applications, OS, and Boot Loader**
- 

**Published Security Technical Implementation Guide (STIG)**
- 

**Secured Linux with Subscription**
- 

**Trusted Platform Module (TPM) On Board**
- 

**FIPS 140-2 Encryption**




### UEI-SAT Security Automation Tool

- Customized GUI
- Key Generation
- Uboot/Linux Authentication
- Linux Kernel and Rootfs Encryption
- Trust Zone via Open, Portable Trusted Execution Environment (OP-TEE)
- Peripheral and Code Execution Security
- FIPS 140-2 Encryption
- Trusted Platform Module (TPM) On Board



### The Right Features For System Control and Lockdown

- Authenticated and encrypted boot for RTOSes or Linux
- Generation of public and private keys for RSA digital signatures
- Support for up to 4096-bit keys for resilience against quantum computing attacks
- Signing of application binaries with RSA signatures
- SHA-256 hashing for authentication of public keys
- Generation of AES keys up to 256 bits in length
- AES-CCM encryption for bootable code stored in flash memory
- Use of immutable Hardware Assisted Boot (HAB) stored in ROM
- Use of AES and SHA-256 hardware accelerators
- Secure UART, USB, JTAG interfaces, and other I/O ports
- Download the secure binaries to flash memory

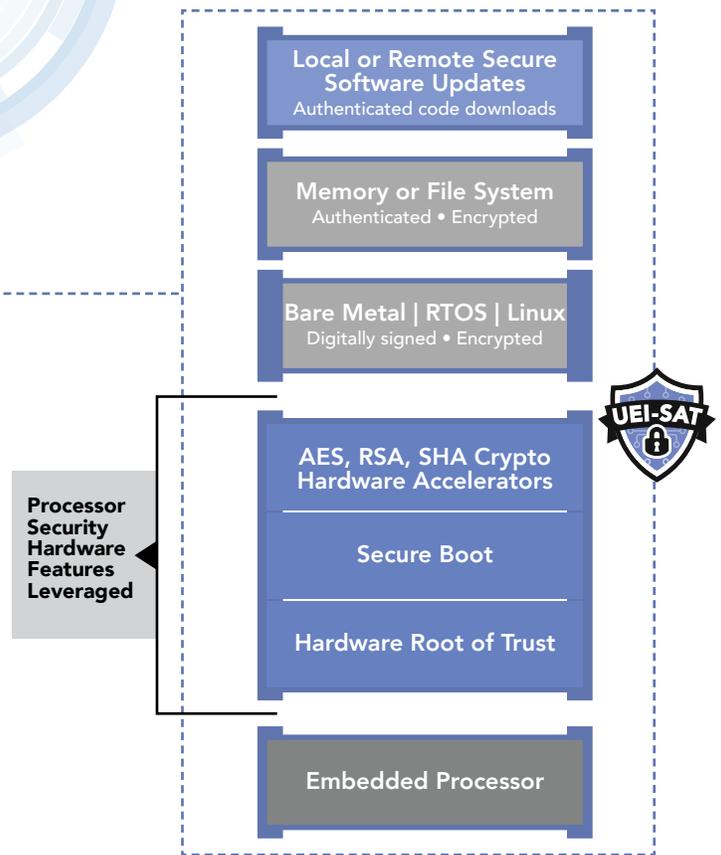

### UEI-SAT ALLOWS FOR:



**REDUCED  
DEVELOPMENT  
TIME**



**R&D  
COST  
SAVINGS**

Cybersecurity is easily transitioned from engineering to deployment

**STEP-BY-STEP TOOL MAKES IT EASY:** UEI-SAT is easy to implement, with no need to trade off product schedules for cybersecurity. Quickly deploy with confidence that security is done right with no need to hire additional experts. All security features provide necessary and important protection.

# SUPPORT SERVICES

## UEI HAS YOU COVERED.



## ENHANCE YOUR APPLICATIONS WITH UEI SUPPORT

United Electronic Industries (UEI) not only manufactures industry-leading data acquisition (DAQ), test, and control I/O systems, but we also offer first-class service and support solutions for the life of your application. Our hardware is designed for maximum flexibility and to be easy to set up and operate, but every application has its unexpected challenges. When you partner with our experienced customer service team, you gain access to a wealth of masterful system insight that will bolster operational efficiencies, increase uptime, reduce cost and time to deployment, and help support critical application goals. UEI stands by our customers, and we have comprehensive support offerings for all the needs of your program.

## IMPACTFUL SERVICE. REAL RESULTS.

"...nice to work with a company that actually supports their products. That's becoming rare these days."

— Sr. Software Engineer, SAIC

"Your willingness and ability to support our urgent request and the support we have received so far from your support team has completely sold our entire team on your products."

— Real-Time Test and Simulation Engineer, Honda Aircraft

"Your technical support is phenomenal. It's so great to quickly get in touch with you guys rather than being routed through 30 different switchboards. It's a big help."

— Thermal Engineer, NASA

## Learn more about our diverse service package offerings.

### TRAINING



Get up to speed fast. Schedule a UEI Applications Engineer to streamline your start up.

### EXTENDED WARRANTY



Extend our already best in class warranty to gain peace of mind through the life of your project.

### ENHANCED SUPPORT



Secure elevated resources dedicated to the needs of your program, with full cost control.

### SUBSCRIPTIONS



Gain access to tools to further strengthen and secure your development.

UEI service and support packages help ensure your continued success with our commitment to service excellence. With our variety of packages and subscriptions, we aim to meet the various budget needs that address diverse coverage as well as financial and administrative requirements. For up-to-date licensing information and product-specific disclaimers, contact UEI Technical Services.

# I/O BOARD SPECIFICATIONS



## ■ GUARDIAN SERIES ADVANTAGE On-Board I/O Monitoring System

Open/Broken Sensor Detection • Channel Self-Test without Field Wiring Disconnection • Current/Voltage Monitoring • Circuit Breaker Functionality

**COMPLETE SELF-CHECK**  
From the Chassis to the Board to the Channel

**ELIMINATE HEADACHES**  
Save Time • Reduce Monitoring Complexity • Lower Costs (No External Test Equipment)

## ANALOG INPUT

| Board Type                                  | Part Number (DNx-) | Number of Channels | Resolution (Bits) | Maximum Sample Rate (Channel) kS/sec | Maximum Sample Rate (Board) kS/sec | Simultaneous Sampling (No MUX) | Maximum Input Range        | Minimum Input Range         | Channel-to-Channel Isolation | MTBF     |
|---|--------------------|--------------------|-------------------|--------------------------------------|------------------------------------|--------------------------------|----------------------------|-----------------------------|------------------------------|----------|
| General Purpose, Low Noise                  | AI-207             | 16                 | 18                | 16                                   | 16                                 | -                              | ± 10 V                     | ± 12.5 mV                   | -                            | >600,000 |
| High Speed, Simultaneous Sampling           | AI-217             | 16                 | 24                | 120                                  | 1000                               | ✓                              | ± 10 V                     | ± 156 mV                    | -                            | 275,000  |
| High Density                                | AI-248-230         | 24                 | 18                | 0.25                                 | 6                                  | -                              | + 32/<br>- 2 V             | ± 32 mV                     | -                            | 550,000  |
| High Density, High Speed                    | AI-201-100         | 24/12              | 16                | 100                                  | 100                                | -                              | ± 15 V                     | ± 1.5 V                     | -                            | 600,000  |
| High Speed, High Voltage                    | AI-205             | 4                  | 18                | 250                                  | 1000                               | ✓                              | ± 100 V                    | ± 100 mV                    | ✓                            | >600,000 |
| High Speed, Fully Isolated                  | AI-218             | 8                  | 24                | 120                                  | 480                                | ✓                              | ± 10 V                     | ± 156 mV                    | ✓                            | 290,000  |
| High Voltage, Fully Isolated                | AI-228-300         | 8                  | 24                | 120                                  | 480                                | ✓                              | ± 300 V                    | ± 37.5 V                    | ✓                            | 290,000  |
| Current Input                               | AI-202             | 12                 | 16                | 16                                   | 16                                 | -                              | ± 150 mA                   | ± 1.5 mA                    | -                            | >600,000 |
| 0-20/4-20 mA Input                          | AI-204             | 24                 | 18                | 1                                    | 24                                 | -                              | 0-20 mA                    | 0-0.2 mA                    | -                            | >500,000 |
| Thermocouple – Fully Isolated               | AI-212             | 12                 | 24                | 1.5                                  | 18                                 | ✓                              | ± 2.048 V                  | ± 32 mV                     | ✓                            | 230,000  |
| Thermocouple, High Resolution, High Density | AI-225             | 25                 | 24                | 1                                    | 25                                 | ✓                              | ± 1.25 V                   | -                           | -                            | 520,000  |
| RTD/Resistance                              | AI-222             | 12                 | 24                | 0.150                                | 1.8                                | ✓                              | 40k Ω                      | 100 Ω                       | ✓                            | 230,000  |
| Strain/Bridge Input, Low Cost               | AI-208             | 8                  | 18                | 8                                    | 8                                  | -                              | ± 10 V                     | ± 12.5 mV                   | -                            | >600,000 |
| Strain/Bridge Input, High Performance       | AI-224             | 4                  | 18                | 100                                  | 400                                | ✓                              | ± 10 V                     | ± 78 mV                     | ✓                            | 260,000  |
| ICP/IEPE Accelerometers                     | AI-211             | 4                  | 24                | 125                                  | 500                                | ✓                              | + 25/<br>- 13 V            | ± 2.5 V                     | ✓                            | 250,000  |
| LVDT/RVDT                                   | AI-254*            | 4                  | 16                | 5                                    | 20                                 | ✓                              | 28 Vrms                    | 2 Vrms                      | ✓                            | 275,000  |
| Synchro/Resolver                            | AI-255*            | 2                  | 16                | 4                                    | 8                                  | ✓                              | 28 Vrms                    | 2 Vrms                      | ✓                            | 275,000  |
| Synchro/Resolver                            | AI-255-815*        | 2                  | 16                | 4                                    | 8                                  | ✓                              | 115 Vrms                   | 5 Vrms                      | ✓                            | 275,000  |
| LVDT/RVDT, Synchro/Resolver, High Drive     | AI-256*            | 2                  | 16                | 10                                   | 20                                 | ✓                              | 28 Vrms                    | 5 Vrms                      | ✓                            | 275,000  |
| Digital Multimeter (DMM)                    | DMM-261            | 1                  | 6.5 digit         | Range Dependent                      | Range Dependent                    | n/a                            | 300 VDC<br>3 ADC<br>100 MΩ | 30 mVDC<br>1.5 mADC<br>10 Ω | ✓                            | 300,000  |

■ Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

\*Also functions as simulated output

## ANALOG OUTPUT–GENERAL PURPOSE

| Board Type                                       | Part Number (DNx-)             | Number of Channels | Update Rate (Channel) kS/sec | Update Rate (Board) kS/sec | Output Range (Volts) | Output Current Drive (mA) | Channel-to-Channel Isolation | MTBF    |
|--|--------------------------------|--------------------|------------------------------|----------------------------|----------------------|---------------------------|------------------------------|---------|
| General Purpose                                  | <a href="#">AO-308</a>         | 8                  | 100                          | 500                        | +/- 10               | +/- 5                     | -                            | 480,000 |
| Fully Isolated With Readback                     | <a href="#">AO-318</a>         | 8                  | 10                           | 80                         | +/- 10               | +/- 10                    | ✓                            | 480,000 |
| High Current                                     | <a href="#">AO-308-350</a>     | 8                  | 100                          | 800                        | +/- 10               | +/- 50                    | -                            | 480,000 |
| High Density                                     | <a href="#">AO-332</a>         | 32                 | 10                           | 320                        | +/- 10               | +/- 10                    | -                            | 400,000 |
| High Density                                     | <a href="#">AO-332-828</a>     | 28                 | 10                           | 280                        | +/- 10               | +/- 10                    | -                            | 400,000 |
| High Density With Readback                       | <a href="#">AO-333</a>         | 32                 | 10                           | 320                        | +/- 10               | +/- 10                    | -                            | 400,000 |
| Medium Voltage/Current                           | <a href="#">AO-308-352</a>     | 8                  | 100                          | 800                        | +/- 13.5             | +/- 13.5                  | -                            | 480,000 |
| High Voltage                                     | <a href="#">AO-308-353</a>     | 8                  | 100                          | 800                        | +/- 40               | +/- 5                     | -                            | 480,000 |
| Current Output (0–20 mA)                         | <a href="#">AO-308-020</a>     | 8                  | 100                          | 800                        | -                    | 0 - 20                    | -                            | 480,000 |
| Current Output (Sourcing) Isolated with Readback | <a href="#">AO-318-020</a>     | 8                  | 10                           | 80                         | -                    | 0 - 20                    | ✓                            | 480,000 |
| Current Output (Sourcing) Isolated with Readback | <a href="#">AO-318-024</a>     | 8                  | 10                           | 80                         | -                    | 0 - 24                    | ✓                            | 480,000 |
| Current Output (Sinking) Isolated with Readback  | <a href="#">AO-319-420</a>     | 8                  | 10                           | 80                         | -                    | 4 - 20                    | ✓                            | 480,000 |
| Current Output (4–20 mA)                         | <a href="#">AO-308-420</a>     | 8                  | 100                          | 800                        | -                    | 4 - 20                    | -                            | 480,000 |
| Function Generator /AWFG                         | <a href="#">AO-364</a>         | 4                  | 150                          | 600                        | +/- 12               | +/- 10                    | ✓                            | 290,000 |
| High Current Buffer (External)                   | <a href="#">UEI-STP-AO-200</a> | 8                  | -                            | -                          | +/- 10               | +/- 250                   | -                            | 200,000 |
| High Current, High Voltage (External)            | <a href="#">DNA-STP-AO-250</a> | 4                  | -                            | -                          | 0 - 35               | +/- 250                   | -                            | 200,000 |
| High Voltage Amplifier (External)                | <a href="#">PD-AO-AMP-115</a>  | 16                 | -                            | -                          | +/- 115              | +/- 10                    | -                            | 100,000 |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

\*Also functions as simulated output

## ANALOG OUTPUT–SIMULATION

| Board Types                           | Part Number (DNx-)          | Number of Channels | Update Rate (Channel) kS/sec | Update Rate (Board) kS/sec | Output Range (Volts)      | Output Current Drive (mA) | Channel-to-Channel Isolation | MTBF     |
|---------------------------------------|-----------------------------|--------------------|------------------------------|----------------------------|---------------------------|---------------------------|------------------------------|----------|
| <b>SIMULATED DEVICE/SENSOR</b>        |                             |                    |                              |                            |                           |                           |                              |          |
| Strain Gage Simulator, 350 Ohm        | <a href="#">AO-358-350</a>  | 8 Bridges          | 5                            | 40                         | N/A                       | N/A                       | -                            | 300,000  |
| Strain Gage Simulator, 1k Ohm         | <a href="#">AO-358-102</a>  | 8 Bridges          | 5                            | 40                         | N/A                       | N/A                       | -                            | 300,000  |
| Simulated LVDT/RVDT                   | <a href="#">AI-254</a>      | 4                  | 5 kHz exc                    | -                          | 0 - 6.7 Vrms              | 65 mA                     | ✓                            | 275,000  |
| Simulated Synchro / Resolver          | <a href="#">AI-255</a>      | 2                  | 4 kHz exc                    | -                          | 0–28 Vrms                 | 1.2 VA                    | ✓                            | 275,000  |
| Simulated S/R & LVDT/RVDT, High Drive | <a href="#">AI-256</a>      | 2                  | 10 kHz exc                   | -                          | 0 - 19.8 Vrms             | 2.4 VA                    | ✓                            | 275,000  |
| Transformer Coupler for AI-254        | <a href="#">TRF-254-447</a> | 4                  | 5 kHz                        | -                          | 4.47:1 ratio              | 4.47:1 ratio              | -                            | -        |
| Transformer Coupler for AI-254        | <a href="#">TRF-254-122</a> | 4                  | 5 kHz                        | -                          | 1.22:1 ratio              | 1.22:1 ratio              | -                            | -        |
| Simulated Thermocouple with CJC       | <a href="#">TC-378</a>      | 8                  | 1 kHz                        | 8 kHz                      | +/- 100 mV 16 bits        | +/- 10 mA                 | ✓                            | 250,000  |
| Simulated RTD 100 Ohm                 | <a href="#">RTD-388-100</a> | 8                  | 200 Hz                       | 200 Hz                     | 23-390 Ω,<br>7500 steps   | +/- 4 mA<br>Input         | ✓                            | >400,000 |
| Simulated RTD 1k Ohm                  | <a href="#">RTD-388</a>     | 8                  | 200 Hz                       | 200 Hz                     | 180-3900 Ω,<br>7500 steps | +/- 4 mA<br>Input         | ✓                            | >400,000 |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

# I/O BOARD SPECIFICATIONS CONTINUED

## DIGITAL I/O

| Board Type                                   | Part Number (DNx-)          | Number of Channels | Input (kHz) | Output kS/sec   | Drive Capacity (Continuous/Peak) | Range (Min V)             | Range (Max V)   | Change of State              | MTBF     |
|--|-----------------------------|--------------------|-------------|-----------------|----------------------------------|---------------------------|-----------------|------------------------------|----------|
| <b>DISCRETE I/O</b>                          |                             |                    |             |                 |                                  |                           |                 |                              |          |
| Logic Level                                  | <a href="#">DIO-403</a>     | 48                 | 10          | 20              | 16 mA                            | 2.5                       | 5.5             | ✓                            | >600,000 |
| Sourcing Outputs, 3.3–36 VDC Inputs          | <a href="#">DIO-404</a>     | 12 in/12 out       | 100         | 100             | 350 mA/500 mA                    | 3.3                       | 36              | ✓                            | 375,000  |
| Sourcing Darlington Outputs, 5–36 VDC Inputs | <a href="#">DIO-405</a>     | 12 in/12 out       | 1           | 1               | 80 mA/200 mA                     | 5                         | 36              | ✓                            | >600,000 |
| Sinking Outputs, 3.3–36 VDC Inputs           | <a href="#">DIO-406</a>     | 12 in/12 out       | 100         | 100             | 1 A/1.5 A                        | 3.3                       | 36              | ✓                            | 375,000  |
| <b>DISCRETE INPUTS</b>                       |                             |                    |             |                 |                                  |                           |                 |                              |          |
| 5–36 VDC Inputs                              | <a href="#">DIO-401</a>     | 24                 | 1           | -               | -                                | 5                         | 36              | ✓                            | >600,000 |
| 0–32 VDC Inputs                              | <a href="#">DIO-448</a>     | 48                 | 1           | -               | -                                | -1                        | 32              | -                            | 550,000  |
| 0–150 V AC/DC Inputs                         | <a href="#">DIO-449</a>     | 48                 | 1           | -               | -                                | -150                      | 150             | ✓                            | 500,000  |
| Board Type                                   | Part Number (DNx-)          | Number of Channels | Input (kHz) | Output (kS/sec) | Drive Capacity (Continuous/Peak) | Range (Min V)             | Range (Max V)   | PWM                          | MTBF     |
| <b>DISCRETE OUTPUTS</b>                      |                             |                    |             |                 |                                  |                           |                 |                              |          |
| Sourcing Darlington Outputs                  | <a href="#">DIO-402</a>     | 24                 | -           | 1               | 80 mA/200 mA                     | 7                         | 36              | -                            | >600,000 |
| Solenoid Drive (Source/Sink), 3.3–36 VDC     | <a href="#">DIO-416-32</a>  | 32                 | -           | 0.125           | 500 mA/3.5 A                     | 3.3                       | 48              | -                            | 130,000  |
| Sinking Outputs, 3–36 VDC                    | <a href="#">DIO-432</a>     | 32                 | -           | 1               | 600 mA/3.5 A                     | 3.3                       | 36              | ✓                            | 260,000  |
| Low-leakage, Sinking Outputs, 3–36 VDC       | <a href="#">DIO-432-800</a> | 32                 | -           | 1               | 600 mA/3.5 A                     | 3.3                       | 36              | ✓                            | 260,000  |
| Sourcing Outputs, 3–36 VDC                   | <a href="#">DIO-433</a>     | 32                 | -           | 1               | 600 mA/3.5 A                     | 3.3                       | 36              | ✓                            | 260,000  |
| Low-leakage, Sourcing Outputs, 3–36 VDC      | <a href="#">DIO-433-800</a> | 32                 | -           | 1               | 600 mA/3.5 A                     | 3.3                       | 36              | ✓                            | 260,000  |
| <b>RELAY OUTPUTS</b>                         |                             |                    |             |                 |                                  |                           |                 |                              |          |
| Solid State Relay Outputs, Form A            | <a href="#">DIO-430</a>     | 30                 | -           | 1               | 400 mA/2 A                       | 0                         | 55 VDC/55 VAC   | -                            | 600,000  |
| Relay Outputs, Form C                        | <a href="#">DIO-452</a>     | 12                 | -           | 0.125           | 2 A                              | 0                         | 220 VDC/250 VAC | -                            | 275,000  |
| Relay Outputs, Form C                        | <a href="#">DIO-462</a>     | 12                 | -           | 0.125           | 2 A                              | 0                         | 220 VDC/250 VAC | -                            | 260,000  |
| Solid State Relay Outputs, Form A (NO)       | <a href="#">DIO-463</a>     | 12                 | -           | 0.125           | 2 A                              | 0                         | 51 VDC/51 VAC   | -                            | 260,000  |
| High Current Relay Outputs, Form C           | <a href="#">DIO-470</a>     | 10                 | -           | 0.125           | 5 A                              | 0                         | 140 VDC/150 VAC | -                            | 275,000  |
| Board Type                                   | Part Number (DNx-)          | Number of Channels | Relay Type  | Output          | Drive Capacity Continuous / Peak | Maximum On/Off Resistance | Range (Max V)   | Channel-to-Channel Isolation | MTBF     |
| <b>MULTIPLEXERS</b>                          |                             |                    |             |                 |                                  |                           |                 |                              |          |
| 3 to 1 Routing Board                         | <a href="#">MUX-414/418</a> | 14/18              | SSR         | 300 Hz          | 2 A/3 A                          | 200 mΩ/10 <sup>8</sup> Ω  | 60 VDC          | ✓                            | >400,000 |
| Multiplexer for the DMM-261                  | <a href="#">MUX-461</a>     | 26/13–2/4 wire     | Reed        | 500 Hz          | 0.5 A                            | 500 mΩ/10 <sup>10</sup> Ω | 170 Vrms        | ✓                            | 180,000  |
| High Voltage Multiplexer for the DMM-261     | <a href="#">MUX-461-350</a> | 24/12–2/4 wire     | SSR         | 500 Hz          | 0.5 A                            | 4 Ω/10 <sup>6</sup> Ω     | +/- 350 V       | ✓                            | 180,000  |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

## MULTIFUNCTION I/O MultiFunction Analog and Digital Board DNx-MF-101

| ANALOG INPUT                       |                    |                    |   |                                    |                            |                                |  |         |
|------------------------------------|--------------------|--------------------|---|------------------------------------|----------------------------|--------------------------------|--|---------|
| Type                               | Number of Channels | Resolution (Bits)  | Maximum Sample Rate (Channel) kS/sec                  | Maximum Sample Rate (Board) kS/sec | Maximum Input Range        | Minimum Input Range            | MTBF   |         |
| General Purpose, Medium Voltage    | 16 SE, 8 diff      | 18                 | 2   | 16                                 | 80 V                       | 0.156 V                        | 300,000  |         |
| ANALOG OUTPUT                      |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Resolution (Bits)  | Update Rate (Channel) kS/sec                          | Update Rate (Board) kS/sec         | Voltage Output Mode Range  | Current Output Mode Range (mA) | MTBF   |         |
| General Purpose Voltage or Current | 2                  | 16                 | 2   | 4                                  | +/- 10 V,<br>+/-5 V @ 5 mA | 0-20, 4-20, -1-22              | 300,000  |         |
| DIGITAL I/O                        |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Input (kHz)        | Output (kS/sec)                                       | Drive Capacity                     | Range (Min V)              | Range (Max V)                  | Notes  | MTBF    |
| Industrial Voltage                 | 16                 | 1                  | 1   | 500 mA                             | 3.3                        | 55                             | Inputs: Programmable PU/PD, thresholds<br>Outputs: Sink or Source, PWM control | 300,000 |
| Logic Level                        | 4                  | 1                  | 1   | 5 mA                               | 3.3                        | 5                              | Direction set in groups of 2   | 300,000 |
| SERIAL/CAN BUS                     |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Transfer Rate      | Notes   | MTBF                               |                            |                                |  |         |
| RS-232/422/485                     | 1                  | 2 Mbaud            | 2048 word FIFO, Interrogation Scheduler               | 300,000                            |                            |                                |  |         |
| I <sup>2</sup> C                   | 1                  | 100k, 400k, 1 Mbit | Master, Slave, Bus Monitor                            | 300,000                            |                            |                                |  |         |
| COUNTER/TIMER                      |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Clock Rate         | Notes   | MTBF                               |                            |                                |  |         |
| 32 Bit                             | 2                  | 66 MHz             | Counter In/Out can be connected to any Digital In/Out | 300,000                            |                            |                                |  |         |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

## PIO-1010 40-Channel, Fully Integrated I/O System

| ANALOG INPUT                       |                    |                    |   |                                    |                            |                                |  |         |
|------------------------------------|--------------------|--------------------|---|------------------------------------|----------------------------|--------------------------------|--|---------|
| Type                               | Number of Channels | Resolution (Bits)  | Maximum Sample Rate (Channel) kS/sec                  | Maximum Sample Rate (Board) kS/sec | Maximum Input Range        | Minimum Input Range            | MTBF   |         |
| General Purpose, Medium Voltage    | 16 SE, 8 diff      | 18                 | 2   | 16                                 | 80 V                       | 0.156 V                        | 300,000  |         |
| ANALOG OUTPUT                      |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Resolution (Bits)  | Update Rate (Channel) ks/sec                          | Update Rate (Board) ks/sec         | Voltage Output Mode Range  | Current Output Mode Range (mA) | MTBF   |         |
| General Purpose Voltage or Current | 2                  | 16                 | 2   | 4                                  | +/- 10 V,<br>+/-5 V @ 5 mA | 0-20, 4-20, -1-22              | 300,000  |         |
| DIGITAL I/O                        |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Input (kHz)        | Output (kS/sec)                                       | Drive Capacity                     | Range (Min V)              | Range (Max V)                  | Notes  | MTBF    |
| Industrial Voltage                 | 16                 | 1                  | 1   | 500 mA                             | 3.3                        | 55                             | Inputs: Programmable PU/PD, thresholds<br>Outputs: Sink or Source, PWM control | 300,000 |
| Logic Level                        | 4                  | 1                  | 1   | 5 mA                               | 3.3                        | 5                              | Direction set in groups of 2   | 300,000 |
| SERIAL/CAN BUS                     |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Transfer Rate      | Notes   | MTBF                               |                            |                                |  |         |
| RS-232/422/485                     | 1                  | 2 Mbaud            | 2048 word FIFO, Interrogation Scheduler               | 300,000                            |                            |                                |  |         |
| I <sup>2</sup> C                   | 1                  | 100k, 400k, 1 Mbit | Master, Slave, Bus Monitor                            | 300,000                            |                            |                                |  |         |
| COUNTER/TIMER                      |                    |                    |   |                                    |                            |                                |  |         |
| Type                               | Number of Channels | Clock Rate         | Notes   | MTBF                               |                            |                                |  |         |
| 32 Bit                             | 2                  | 66 MHz             | Counter In/Out can be connected to any Digital In/Out | 300,000                            |                            |                                |  |         |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

# I/O BOARD SPECIFICATIONS CONTINUED

## SERIAL/CAN BUS

| Communications Bus Protocol          | Part Number (DNx-)         | Physical Interface | Number of Channels | Transfer Rate      | Notes   | Channel-to-Channel Isolation | MTBF    |
|--------------------------------------|----------------------------|--------------------|--------------------|--------------------|---|------------------------------|---------|
| High Speed CAN                       | <a href="#">CAN-503</a>    | CAN 2.0            | 4                  | 1 Mbit             | J1939 and CAN .DBC support  | ✓                            | 350,000 |
| I <sup>2</sup> C/SMBus               | <a href="#">I2C-534</a>    | I <sup>2</sup> C   | 4                  | 100k, 400k, 1M bit | Guardian read-back of master transmissions confirms validity of transmit data | ✓                            | 350,000 |
| 4-port Serial                        | <a href="#">SL-501</a>     | RS-232/422/485     | 4                  | 2 Mbaud            | J1587/J1708, Interrogation Scheduler  | ✓                            | 350,000 |
| 4-port High Speed Serial             | <a href="#">SL-501-804</a> | RS-232/422/485     | 4                  | 4 Mbaud            | J1587/J1708, Interrogation Scheduler  | ✓                            | 350,000 |
| 8-port Serial                        | <a href="#">SL-508</a>     | RS-232/422/485     | 8                  | 1 Mbaud            | J1587/J1708, Interrogation Scheduler  | ✓                            | 290,000 |
| HDLC/SDLC Synchronous                | <a href="#">SL-504</a>     | RS-232/422/423/485 | 4                  | 4 Mbaud            | HDLC/SDLC TX/RX Synch.  | ✓                            | 350,000 |
| Synchronous Serial Interface (SSI)   | <a href="#">SL-514</a>     | RS-485/422         | 4                  | 2.5 MHz            | Master, Slave 3-32 bits, FIFO onboard   | ✓                            | 350,000 |
| GP Synchronous Serial Communications | <a href="#">CT-602-804</a> | RS-485/422         | 4                  | 16 Mbaud           | General Purpose   | ✓                            | 350,000 |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

Remote Serial Server available for all RS232/422/485 boards on Linux & Windows.

## COUNTER / TIMERS

| Counter/Timer Function     | Part Number (DNx-)       | Type              | Number of Channels | Clock Rate   | Notes                             | Channel -to-Channel Isolation | MTBF    |
|----------------------------|--------------------------|-------------------|--------------------|--------------|-----------------------------------|-------------------------------|---------|
| High Speed Counter/Timer   | <a href="#">CT-601</a>   | 32 Bits           | 8                  | 66 MHz       | Debouncing on Clock & Gate Inputs | -                             | 350,000 |
| Differential Counter/Timer | <a href="#">CT-602</a>   | 32 Bits           | 4                  | 66 MHz       | RS-422/485 Logic Levels           | ✓                             | 350,000 |
| Quadrature Encoder Input   | <a href="#">QUAD-604</a> | A,B, & Z inputs   | 4                  | 16.5 MHz     | Buffered or Single Point Readings | -                             | 350,000 |
| Universal Speed Input      | <a href="#">VR-608</a>   | 50 mV - 250 V p-p | 8                  | 300 kHz      | 4 Freq Out, Double/Low Tooth      | ✓                             | 180,000 |
| IRIG Timing Gen & Synch    | <a href="#">IRIG-650</a> | A/B/E/G type      | 1                  | 1, 5, 10 MHz | On-board GPS Receiver             | ✓                             | 240,000 |
| Precision Timing Interface | <a href="#">CT-651</a>   | ICD-GPS-060       | 4                  | 1 PPS        | Slaved or Free Run/Fix Wheel      | ✓                             | 350,000 |

## INSTRUMENTS

| Board Type                               | Part Number (DNx-)          | Number of Channels | Update Rate (Channel) | Ranges  | Type   | Current                           | Channel -to-Channel Isolation | MTBF                          |           |
|--|-----------------------------|--------------------|-----------------------|---|--|-----------------------------------|-------------------------------|-------------------------------|-----------|
| 6.5 Digit DMM                            | <a href="#">DMM-261</a>     | 1                  | 100 Hz                | +/- 300 VDC, +/- 30 mVDC, +/- 300 Vrms, +/- 500 mVrms, 100 MΩ to 10 Ω | VDC, VAC, IDC, IAC and Resistance                          | +/- 3 A AC/DC<br>+/- 1.5 mA AC/DC | ✓                             | 300,000                       |           |
| Board Type                               | Part Number (DNx-)          | Number of Channels | Relay Type            | Output  | Drive Capacity Continuous/Peak                             | Maximum On/Off Resistance         | Range (max V)                 | Channel -to-Channel Isolation | MTBF      |
| Multiplexer                              | <a href="#">MUX-414/418</a> | 14/18              | SSR                   | 300 Hz  | 2 A/3 A  | 200 mΩ/10 <sup>8</sup> Ω          | 60 VDC                        | ✓                             | > 400,000 |
| Board Type                               | Part Number (DNx-)          | Number of Channels | Update Rate (Channel) | Ranges  | Type   | Current                           | Channel -to-Channel Isolation | MTBF                          |           |
| Function/Arbitrary Waveform Generator    | <a href="#">AO-364</a>      | 4                  | 150 kHz               | +/- 12 V  | Sine, Square, Triangle, Trapezoid, AWFG                    | +/- 10 mA                         | ✓                             | 290,000                       |           |
| Multiplexer for the DMM-261              | <a href="#">MUX-461</a>     | 26/13 – 2/4 wire   | 500 Hz                | 170 Vrms  | 2-wire voltage<br>2-wire current<br>2 or 4-wire resistance | +/- 0.5 A                         | ✓                             | 180,000                       |           |
| High Voltage Multiplexer for the DMM-261 | <a href="#">MUX-461-350</a> | 24/12 – 2/4 wire   | 500 Hz                | +/- 350 V   | 2-wire voltage<br>2-wire current<br>2 or 4-wire resistance | +/- 0.5 A                         | ✓                             | 180,000                       |           |

## AVIONICS I/O

| Protocol              | Part Number (DNx-) | Type        | Number of Channels | Transfer Rate  | Notes   | Channel-to-Channel Isolation | MTBF    |
|-----------------------|--------------------|-------------|--------------------|----------------|---|------------------------------|---------|
| 1553 (Dual Redundant) | 1553-553           | 2 Ports     | 2                  | 1 Mbaud        | Bus Cont, Remote Term, or BM                          | ✓                            | 275,000 |
| ARINC-429             | 429-566            | 6 TX/6 RX   | 12                 | 12.5/100 kb    | Williamsburg V1 Support                               | -                            | 470,000 |
| ARINC-429             | 429-512            | 12 RX       | 12                 | 12.5/100 kb    | Williamsburg V1 Support                               | -                            | 470,000 |
| ARINC-429             | 429-516            | 16 TX/24 RX | 24                 | 12.5/100 kb    | 256 labels/ch on-board scheduler, 2k I/O FIFO/Channel | ✓                            | 470,000 |
| ARINC-615             | 429-XXX            | Up to 16    | 16                 | 12.5/100k baud | Williamsburg for Airborne & Portable Data Loader      | ✓                            | 470,000 |
| ARINC-708/453         | 708-453            | 2 TX/2 RX   | 4                  | 1 Mbaud        | Weather or Ground Prox Radar, WXPDP                   | ✓                            | 275,000 |
| ARINC-825             | CAN-503            | 4 Ports     | 4                  | 83.3-1000 kb   | Sensors, Actuators, Software Timing – Transport Only  | ✓                            | 350,000 |
| ARINC-664 Part 7      | ARINC-664          | 2 Ports     | 2                  | 100 Mbaud      | Dual Redundant or Independent                         | -                            | 130,000 |
| ARINC-615A            | ARINC-664          | 2 Ports     | 2                  | 100 Mbaud      | Airborne & Portable Data Loader for Ethernet          | -                            | 130,000 |
| CSDB                  | CSDB-509           | 8 TX/8 RX   | 8                  | 12.5/100 kHz   | 11 bit, Character and Frame Clocks                    | ✓                            | 290,000 |

Guardian Series – Includes a variety of powerful diagnostic and BIT functionality.

## POWER SUPPLIES

| Output Voltage | Part Number (DNx-) | Number of Channels | Output V | Current (Max) | Notes                                  | Fully Isolated | MTBF    |
|----------------|--------------------|--------------------|----------|---------------|--|----------------|---------|
| 10 V           | PC-910             | 1                  | +/- 10   | 1.5 A         | Isolation Current/Voltage Feedback     | ✓              | 150,000 |
| 15 V           | PC-911             | 1                  | +/- 15   | 1.2 A         | Isolation Current/Voltage Feedback     | ✓              | 150,000 |
| 24 V           | PC-912             | 1                  | + 24     | 1.6 A         | Isolation Current/Voltage Feedback     | ✓              | 150,000 |
| 45 V           | PC-913             | 1                  | +/- 45   | 0.4 A         | Isolation Current/Voltage Feedback     | ✓              | 150,000 |
| MIL-704/1275   | PC-921-D           | Internal           | -        | -             | MIL-STD-704/1275/461 Power Conditioner | ✓              | 150,000 |

## RECONFIGURABLE

| Board Type          | Part Number (DNx-) | Connection | Notes                          | FPGA               |
|---------------------|--------------------|------------|--------------------------------|--------------------|
| Reconfigurable FPGA | PL-820             | 2x 62 Pin  | 104 DIO Pins, JTAG Connections | MAX10 / Cyclone II |

# APPLICATION BRIEFS

## BAE SYSTEMS HYBRID BUS ENGINE MONITORING

### CHALLENGE

Provide real-time streaming of vehicle data for preventative maintenance in order to maximize fleet efficiency.

### SOLUTION

Rugged and compact in-vehicle data acquisition system, wirelessly connected to Fleet Health Management Network.

### RESULTS

Improved vehicle uptime and reduced maintenance costs of up to 13%.

### BONUS

BAE has sold thousands of these buses across the world, expanding their business globally.



## ENGINE TEST CELL

U.S. AIR FORCE

### CHALLENGE

Improve reliability and maintainability of engine test cell to meet rising demand and reduced budget.

### SOLUTION

Modular, rugged, Ethernet-based remote DAQ system.


### RESULTS

Maximized test cell uptime, simplified maintenance, and reduced failures, thus meeting schedules and containing costs.

### BONUS

The maintenance and repair operation became much more streamlined. No more re-wiring the engine for each test—the hardware travels with the engine!

## PACER COMET 4 • ENGINE TEST CELL

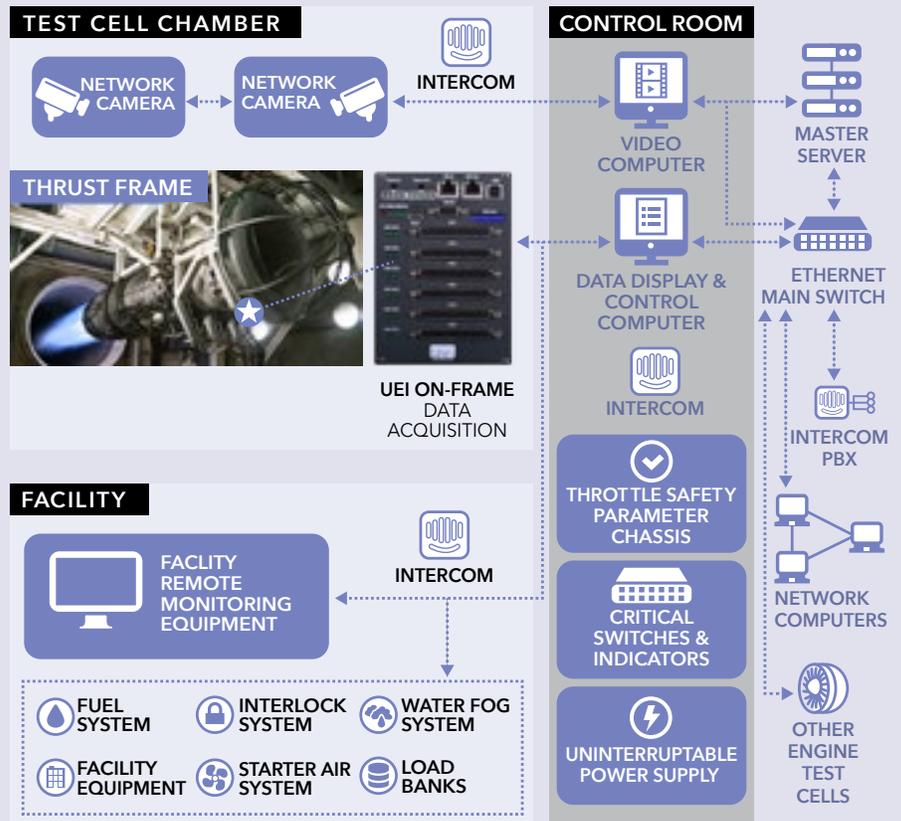

UEI COLLECTS REAL-WORLD DATA FOR THE AEROSPACE, ENERGY AND DEFENSE INDUSTRIES, ALLOWING OUR CUSTOMERS TO BUILD SMART SYSTEMS THAT ARE RELIABLE, FLEXIBLE AND RUGGED.

# FlightSafety<sup>®</sup> international FLIGHT SIMULATORS

## CHALLENGE

Alleviate supply chain headaches of building commercial and military simulators due to product obsolescence and too many suppliers, all while improving the efficiency of their engineering team.

## SOLUTION

Co-designed over a dozen products on standardized UEI reliable, rugged, flexible platform, consolidated three systems into one (combined DAQ and avionics) while significantly reducing cabling/wiring and costly system inspections.

## RESULTS

Saved 10's of millions of dollars through greater production and operational efficiencies. Use of our Guardian solution kept them up 99% of the time.

## BONUS

Saved 1000's of hours to install and maintain, simplified procurement process, increased system reliability, mitigated obsolescence, increased uptime, and improved time to market.



# SPACEX LAUNCH PAD CONTROL

## CHALLENGE

Replace ground support equipment with more robust, reliable, scalable solutions, and remove obsolescence issues. Eliminate backlog in commercial business and risks of losing the space race.

## SOLUTION


UEI changed the architecture of their launch pads, moving from a centralized control system to a distributed system with self-diagnostic capabilities from each node to the control valves.

## RESULTS

With these highly distributed, self-checking systems, U.S. based manned flight is a reality!

## BONUS

SpaceX is back leading the private space race, from satellite constellations to manned flight.

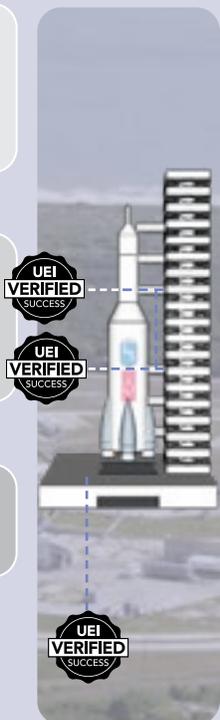

# BLUE ORIGIN ROCKET ENGINE & LAUNCH VEHICLE TEST

## CHALLENGE

Consolidating custom and COTS DAQ and Control hardware into one platform to accelerate development, minimize maintenance, and deliver programs on time.

## SOLUTION



Co-developed COTS hardware based on standardized UEI modular, embedded platform, with a single software API, for HIL/SIL/Engine Test applications.

## RESULTS

Offloaded obsolescence management, improved test capability, and reduced development time critical to winning the Space Race.



## BONUS

3 New COTS I/O Boards Developed! Including the RTD Simulator and Thermocouple Simulator.

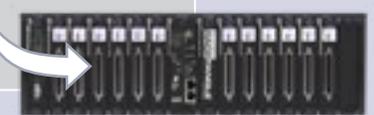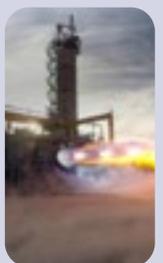

# All the Accessories You Need to

## CUBE, RACK & MIL CHASSIS: AVAILABLE OPTIONS

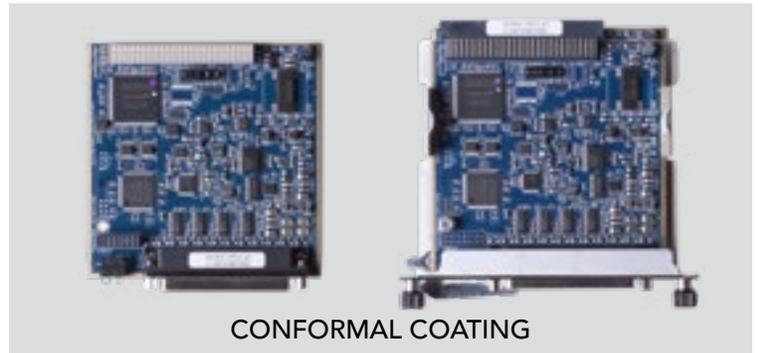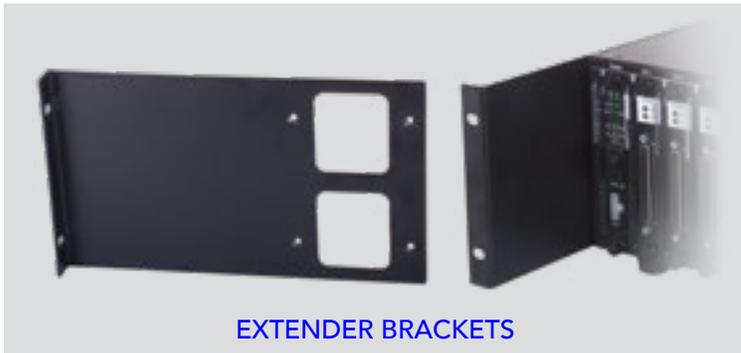

## CABLES, PANEL ADAPTERS & MORE: ADDITIONAL ACCESSORIES



**DON'T SEE WHAT YOU NEED?**  
We most likely have it!  
Contact your UEI representative today.

# Complete Your Perfect I/O System

## SCREW TERMINAL ACCESSORY PANEL

| Board Type                              | Part #                           | Board Specific             | Number of Channels | Connection                | Included With Board |
|---|----------------------------------|----------------------------|--------------------|---------------------------|---------------------|
| 37-channel Input Panel                  | <a href="#">DNA-STP-37</a>       | Any 37 pin connections     | -                  | 37                        | -                   |
| 37-channel Input Panel - DIN Rail Mount | <a href="#">DNA-STP-37-DR</a>    | Any 37 pin connections     | -                  | 37                        | -                   |
| 62-channel Input Panel                  | <a href="#">DNA-STP-62</a>       | Any 62 pin connections     | -                  | 62                        | -                   |
| 62-channel Input Panel - DIN Rail Mount | <a href="#">DNA-STP-62-DR</a>    | Any 62 pin connections     | -                  | 62                        | -                   |
| Universal 37/62 Channel                 | <a href="#">DNA-STP-3762</a>     | 37/62 pin connections      | -                  | 37/62                     | -                   |
| 78-channel Input Panel - DIN Rail Mount | <a href="#">DNA-STP-78-DR</a>    | Any 78 pin connections     | -                  | 78                        | -                   |
| Universal Analog Input Panel            | <a href="#">DNA-STP-AI-U</a>     | DNx-AI-207/217, DNx-AI-225 | 16 and 25          | 37/62                     | -                   |
| 37-way Terminal Panel with CJC Sensor   | <a href="#">DNA-STP-37CJC</a>    | DNx-AI-207                 | 16                 | 37                        | -                   |
| Thermocouple Input Panel                | <a href="#">DNA-STP-AI-207TC</a> | DNx-AI-207                 | 16                 | 37                        | -                   |
| Strain Gage Input Panel                 | <a href="#">DNA-STP-AI-208</a>   | DNx-AI-208                 | 8                  | 37                        | -                   |
| Thermocouple Input Panel                | <a href="#">DNA-STP-AI-212</a>   | DNx-AI-212                 | 12                 | 37                        | ✓                   |
| High Current Input Panel                | <a href="#">DNA-STP-37HC</a>     | DNx-DIO-470                | 10                 | 37                        | -                   |
| Serial 8-port Input Panel               | <a href="#">DNA-STP-508</a>      | DNx-SL-508                 | 8                  | 62                        | -                   |
| Accelerometer Input Panel               | <a href="#">DNA-STP-211</a>      | DNx-AI-211                 | 4                  | 37                        | ✓                   |
| Screw Terminal Board                    | <a href="#">DNA-STP-MF-101</a>   | UEI-PIO-1010, DNx-MF-101   | -                  | 37/62                     | -                   |
| Sync Connection Panel                   | <a href="#">DNA-STP-SYNC-1G</a>  | All                        | Up to 6 chassis    | STP, BNC, DNA-CBL-SYNC-RJ | -                   |
| Screw Terminal/Interconnect with        | <a href="#">DNA-STP-TC-378</a>   | DNx-TC-378                 | -                  | 37                        | -                   |
| Debug Adapter for 37 pin Boards         | <a href="#">DNA-TADP-37</a>      | All                        | -                  | 37                        | -                   |
| Debug Adapter for 62 pin Boards         | <a href="#">DNA-TADP-62</a>      | All                        | -                  | 62                        | -                   |

**Loop Back Test Adaptors: Call UEI**

## CABLES

| Cable Description  | Part #                           | Shielded | Lengths (Ft)       | For Use With                                    |
|--|----------------------------------|----------|--------------------|---|
| RS-232 Port to Female DB-9 Connector                           | <a href="#">CBL-SX6-DIAG</a>     | ✓        | 3                  | -11/-12 (SoloX) & -33/-3A (Zynq) CPU boards     |
| 37-way, Round Cable (Male-Female)                              | <a href="#">DNA-CBL-37S</a>      | ✓        | 1, 3, 5, 10, 20    | All I/O boards with 37-pin connectors           |
| 37-way, Flat Ribbon Cable (Male-Female)                        | <a href="#">DNA-CBL-37</a>       | -        | 3                  | All I/O boards with 37-pin connectors           |
| Right Angle 37-way, Round Cable (Male-Female)                  | <a href="#">DNA-CBL-37RA</a>     | ✓        | 3                  | All I/O boards with 37-pin connectors           |
| Special 37-way, High Current (5 A) cable                       | <a href="#">DNA-CBL-37HC</a>     | ✓        | 3, 6, 12           | DNx-DIO-470                                     |
| DMM and MUX Cable Accessory                                    | <a href="#">DNA-CBL-461</a>      | ✓        | 1                  | DNR Chassis, DNx-DMM-261, DNx-MUX-461, -461-350 |
| 62-way, Round Shielded Cable (Male-Male)                       | <a href="#">DNA-CBL-62</a>       | ✓        | 2.5, 6, 10, 20, 40 | All I/O boards with 62-pin connectors           |
| Right Angle 62-way, Round Shielded Cable (Male-Male)           | <a href="#">DNA-CBL-62RA</a>     | ✓        | 3                  | All I/O boards with 62-pin connectors           |
| 78-way, Round Shielded Cable (Male-Female)                     | <a href="#">DNA-CBL-78</a>       | ✓        | 5                  | All I/O boards with 78-pin connectors           |
| MIL Male 128-pin 38999 to 1x DB-37F                            | <a href="#">DNA-CBL-37M-03</a>   | ✓        | 3                  | DNx-MIL chassis                                 |
| MIL Male 128-pin 38999 to 1x DB-62M                            | <a href="#">DNA-CBL-62M-03</a>   | ✓        | 3                  | DNx-MIL chassis                                 |
| MIL Male 128-pin 38999 to 1x DB-37F and 1x DB-62M              | <a href="#">DNA-CBL-6237M-3</a>  | ✓        | 3                  | DNx-MIL chassis                                 |
| MIL Male 128-pin 38999 to 2x DB-37F 38999                      | <a href="#">DNA-CBL-12837-5</a>  | ✓        | 5                  | DNx-MIL chassis                                 |
| MIL Male 128-pin 38999 to 2x DB-62M 38999                      | <a href="#">DNA-CBL-12862-5</a>  | ✓        | 5                  | DNx-MIL chassis                                 |
| MIL Power Connector Cable                                      | <a href="#">DNA-CBL-1315-03</a>  | ✓        | 3                  | DNx-MIL chassis                                 |
| MIL LAN/Serial/Sync Connector Cable                            | <a href="#">DNA-CBL-LAN-06</a>   | ✓        | 6                  | DNx-MIL chassis                                 |
| BNC Connections for Clock/IRIG & 1553                          | <a href="#">DNA-CBL-650</a>      | ✓        | 2                  | DNx-IRIG-650 (Included with board)              |
| Male 62-pin to four MIL-STD-1553 Connectors                    | <a href="#">DNA-CBL-1553-553</a> | ✓        | 1                  | DNx-1553-553 (Included with board)              |
| 10-32 UNF Coaxial to Std Full-Size BNC Cable/Adaptor           | <a href="#">DNA-CBL-BNC</a>      | ✓        | 3                  | DNx-AI-211                                      |
| 37-way to 4 Single Serial Ports, Round Shielded Cable          | <a href="#">DNA-CBL-COM</a>      | ✓        | 1.5                | DNx-SL-501, DNx-CAN-503, DNx-I2C-534            |
| UEI-PIO-1010 Debugging Cable Breaks Out Power, Serial and Sync | <a href="#">CBL-PIO-DBG</a>      | ✓        | 4.5                | UEI-PIO-1010                                    |
| 62-pin Male to 62-pin Female and 32-pin Female, Shielded Cable | <a href="#">DNA-CBL-MF-101</a>   | ✓        | 3                  | DNx-MF-101 I/O, UEI-PIO-1010, DNA-STP-MF-101    |
| Cube Synchronization Cable                                     | <a href="#">DNA-CBL-SYNC-10</a>  | ✓        | 10                 | DNR/DNF series racks and PPCx-1G Cubes          |

**Typical Products Lead Time Is 4 Weeks with UEI**



### UEI SERVICE PACKAGES

**FIRST CLASS** service and support for the life of your program!

- Enhanced Support
- Extended Warranties
- 17025 Calibration
- And more!

**UEI HAS YOU COVERED!**



We guarantee all chassis & I/O availability for a minimum of 10 years, with a standard warranty of 3 years (upgradable to 10 years).

**"It would be difficult to express how awesome I think your catalog and product line is. Is it FLEXIBLE or POWERFUL? How about both. WOW!"**

—Senior Staff, Embedded Software Engineer, Lockheed Martin Aerospace

## UEI DAQ IS IDEAL FOR A WIDE VARIETY OF APPLICATIONS



**HARDWARE IN THE LOOP  
(HIL)**



**HEALTH USAGE & MONITORING  
(HUMS)**



**SYSTEM INTEGRATION LABS  
(SIL)**



**ENGINE TEST**



**DETERMINISTIC CONTROL**



**HYBRID TEST BENCHES AND  
SILs WITH VISTAS**



**DISTRIBUTED ENGINE TEST  
SYSTEMS WITH iDDS**



**SIMULATORS & TRAINERS**



**GROUND SUPPORT EQUIPMENT  
(GSE)**



**FLIGHT LINE MONITORING**



**EMBEDDED CONTROL &  
LOGGING**



**DISTRIBUTED DAQ & CONTROL**

▶ SEE OUR SYSTEMS IN ACTION AND LEARN FROM OUR EXPERTS AT [UEIDAQ.COM/VIDEOS](http://UEIDAQ.COM/VIDEOS)



TO ORDER:  
CALL 508-921-4600  
EMAIL [info@ueidaq.com](mailto:info@ueidaq.com)  
VISIT [ueidaq.com](http://ueidaq.com)



249 Vanderbilt Avenue, Norwood, MA 02062 USA • Tel: 508-921-4600 Fax: 508-668-2350 • [sales@ueidaq.com](mailto:sales@ueidaq.com)  
Neuer Wall 50, 20354 Hamburg, Germany • Tel: +49 40 63698136 • [salesemea@ueidaq.com](mailto:salesemea@ueidaq.com)