


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		2013.01.07	

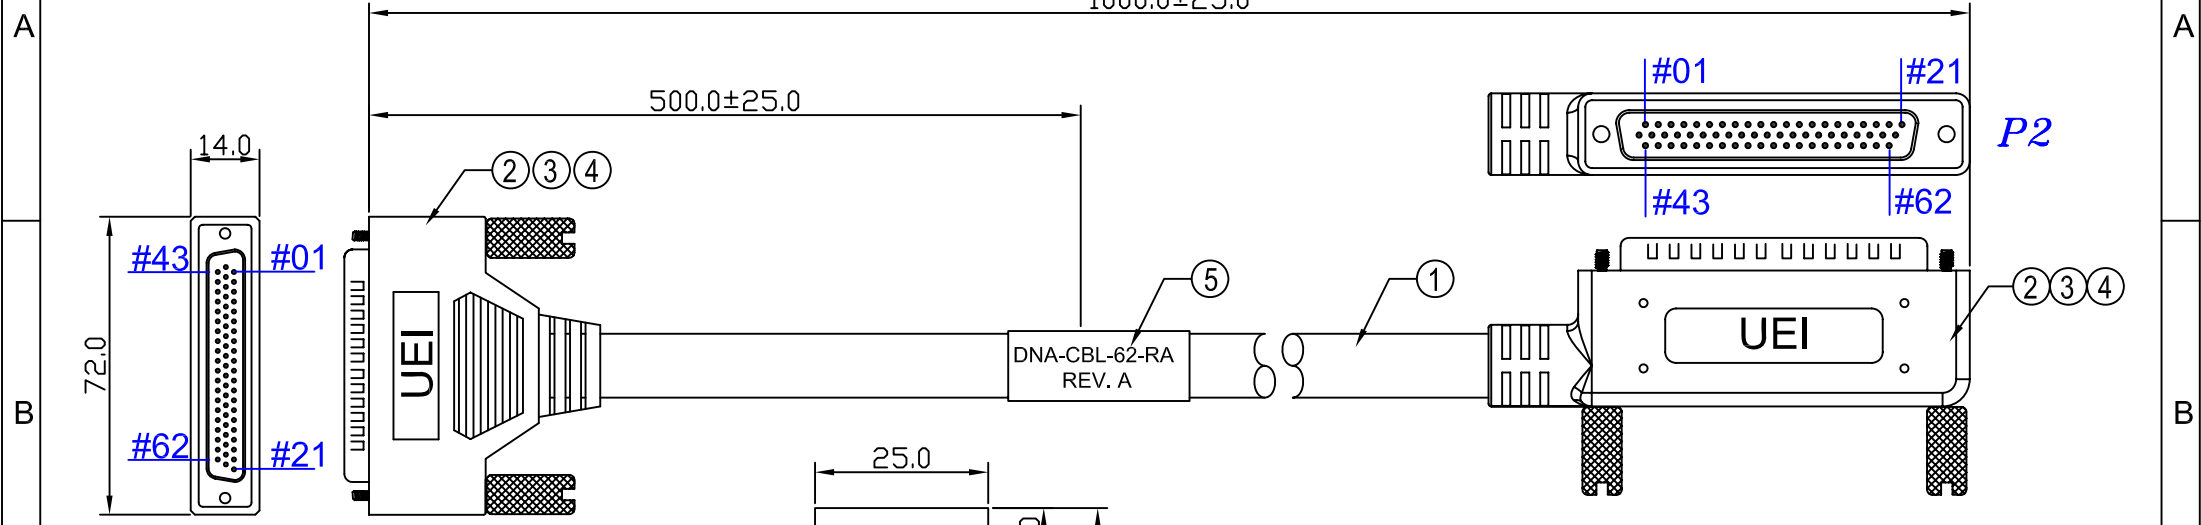

APPROVED BY
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____


PIN OUT

P1	P2	P5	P2	P5	P3	P5	P4
1	1 Blk	9	9Brn	17	17Wht	49	49 Gry/Red
22	22 Blk/Wht	30	30Brn/Wht	38	38Org/Blk	50	50 Gry/Grn
2	2 Brn	10	10Red	18	18Pik	51	51 Blu/Blk
23	23 Brn/Wht	31	31 Red/Wht	39	39Red/Blk	52	52 Vil/Blk
3	3 Red	11	11 Org	19	19Lt Grn	53	53 LT Grn/Blk
24	24 Red/Wht	32	32Org/Wht	40	40Grn/Blk	54	54 LT Grn/Red
4	4 Org	12	12 Yel	20	20Pik/Blk	55	55 LT Grn/Blu
25	25 Org/Wht	33	33 Yel/Blk	41	41Pik/Red	56	56 LT Grn/Grn
5	5 Yel	13	13 Grn	21	21Pik.Blu	57	57 LT Yel/Blk
26	26 Yel/Blk	34	34 Grn/Wht	42	42Pik/Grn	58	58 LT Yel/Red
6	6 Grn	14	14 Blu	43	43Lt Blu	59	59 LT Yel/Blu
27	27 Grn/Wht	35	35Blu/Wht	44	44Lt Yel	60	60 LT Yel/Grn
7	7 Blu	15	15 Vil	45	45Blu/Blk	61	61 Wht/Blk
28	28 Blu/Wht	36	36 Vil/Wht	46	46Blu/Red	62	62 Wht/Red
8	8 Blk	16	16 Gry	47	47Blu/Lt	S	D.W.
29	29 Blk/Wht	37	37 Gry/Blk	48	48Blu/Grn	S	D. W.

Note: P1 and P2 Inside the molded must use copper foil and solder the braid 360 degree to the shell .
Double side " UEI " LOGE

5	Label, Mark with p/n and rev.	PCS	1
4	Outer Molded: 45P PVC, Color: Black.	G	40
3	Screw :4.0*30.5mm (#4-40UNC) Material Screw .	PCS	4
2	P1~P2 Conn: HDB 62PIN Male Solder Type, Inside Black.	PCS	2
1	Cable: UL2576 28AWG*31Pairs+AL/MY+D.W+Braid, OD=11.5±0.15mm Jacket color: Black.	M	1.0

ITEM	DESCRIPTION	UNIT	QT'Y
1			
2			
3			
4			
5			
6			

X ±	X° ±	NAME:	UEI		
.X ±	.X° ±	W1			
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE:	
		MM	UEI-DNA-CBL-62-RA	ASS'Y CABLE	
			TOM	DWG NO.:	
		APPD BY	CHECK BY	DRAWN BY	2013.01.07
					RFQ#UEI2121214-01
					SCALE SHEET REV.
					NONE 1/1 A