


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		01/08/08	

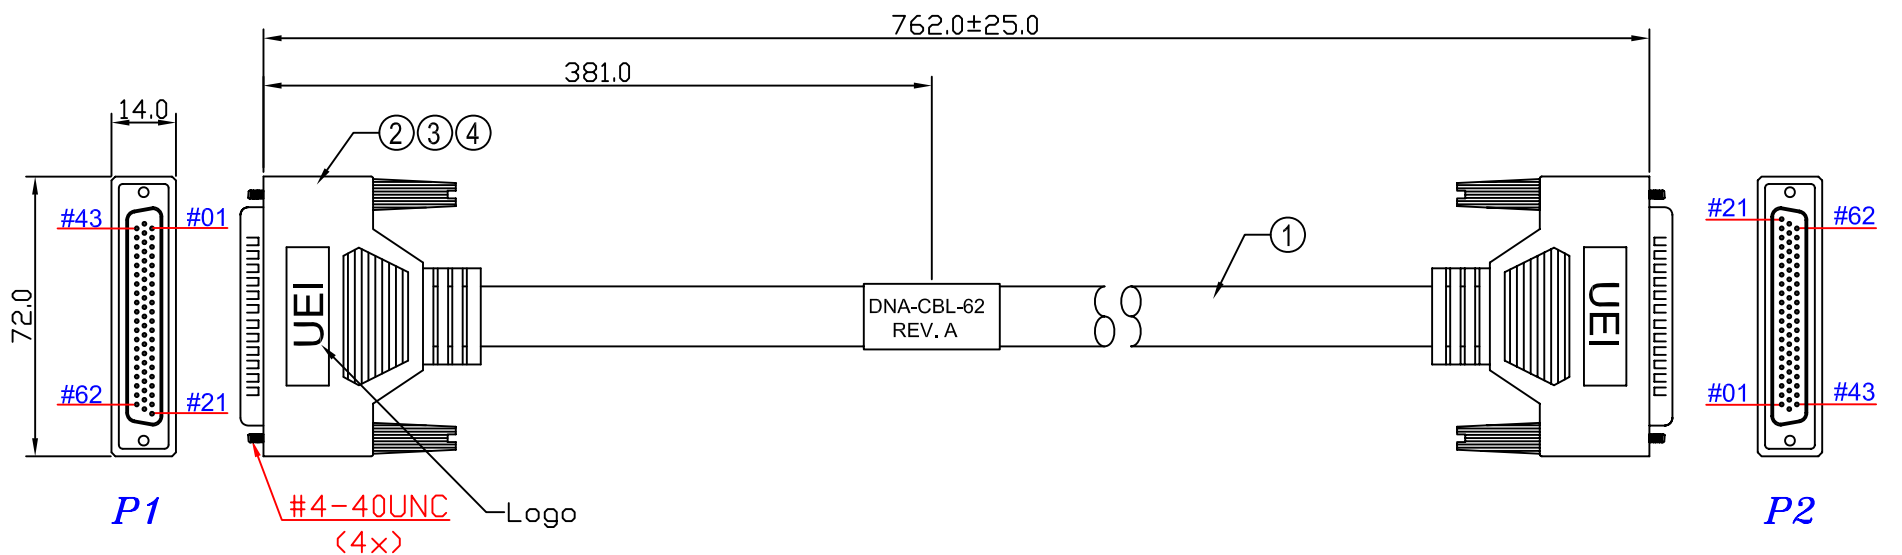

APPROVED BY \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

⚠ Inside the molded P1~P2 end must use copper foil and solder the braid 360 degree to the shell .

PIN OUT

P1	P2	P5	P2	P5	P3	P5	P4
1	1	9	9	17	17	49	49
22	22	30	30	38	38	50	50
2	2	10	10	18	18	51	51
23	23	31	31	39	39	52	52
3	3	11	11	19	19	53	53
24	24	32	32	40	40	54	54
4	4	12	12	20	20	55	55
25	25	33	33	41	41	56	56
5	5	13	13	21	21	57	57
26	26	34	34	42	42	58	58
6	6	14	14	43	43	59	59
27	27	35	35	44	44	60	60
7	7	15	15	45	45	61	61
28	28	36	36	46	46	62	62
8	8	16	16	47	47	S	S
29	29	37	37	48	48	D.W+Braid	S

4	Outer molded: 45P PVC, color: Black .	G	40
3	Screw: E4.0*30.5mm(#4-40UNC) molded Black .	PCS	4
2	P1~P2 Conn: HDB 62PIN male solder type, inside black .	PCS	2
1	Cable: UL2576 28AWG*31Pairs+AL/MY+D.W+Braid, OD=11.5±0.15mm Jacket color: black .	MM	
ITEM	DESCRIPTION	UNIT	QTY

X ±	X° ±	NAME:	WINSTRONICS		
.X ±	.X° ±	W1			
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE:	
		MM	UEI-DNA-CBL-62	ASS'Y CABLE	
			TOM	DWG NO.:	
			2008.01.08	RFQ#UEI0280102-04	
		APPD BY	CHECK BY	DRAWN BY	SCALE SHEET REV.
					NONE 1/1 A

