

DNR-MIL-6

6-Slot, Military-Grade I/O Rack

- Military/Rugged 38999 connectivity
- 100% COTS solution
- Supported by over 90 standard DNR-series I/O boards
- 5 g vibration, 100 g shock, sealed to IP66
- Dual GigE ports (control and diagnostic)
- Designed for MIL-STD-461/810/1275 compliance
- Extensive built-in system diagnostics
- PowerDNA, UEIPAC, UEIMODBUS, UEISIM and UEIOPCUA configurations
- No rotary cooling devices
- Extensive software support including Windows, Linux, VxWorks, QNX, RTX and more
- VxWorks support available in embedded or hosted configurations



The new DNR-MIL-6 provides 6 I/O slots and uses standard DNR-series I/O boards (e.g. DNR-AI-217). It is available in the standard PowerDNR configuration or as a UEIPAC, UEISIM, or UEIOPC.

GENERAL DESCRIPTION

The DNR-MIL-6 is the latest deployment of UEI's popular RACKangle® architecture. It is basically a smaller version of UEI's popular DNR-MIL, and offers slots for six I/O boards, rather than the DNR-MIL's twelve. Designed for use in the toughest environments, the DNR-MIL-6 is ideal for military and aerospace deployments. It is also ideal for a huge assortment of commercial applications, including oil drilling platforms and refineries, heavy machinery, outdoor test stands and any other I/O application that will be exposed to the elements. All connectivity is through ROHS compliant 38999 connectors.

Electronically, the DNR-MIL-6 is identical to the standard DNR Series RACKangle, except for hold-up and protection circuitry on the power supply inputs to meet MIL-STD-1275/704. This means the DNR-MIL-6 uses standard DNR-series boards (e.g. DNR-AI-217 or DNR-1553-553). With over 90 unique I/O boards and 6 slots available, there's sure to be a configuration matching your application.

The new DNR-MIL-6 is designed to meet the most commonly required elements of MIL-STD-461 and -810, and is sealed to at least IP66/NEMA6 standards. All this is housed in a compact 11.6" W x 6.4" D x 7.0" H chassis, weighing approximately 16 pounds and typically consuming less than 30 W. Heat transfer from the internal electronics to the external chassis is designed such that no fans or rotary cooling is required. The lack of fans maximizes MTBF and mechanical reliability. All internal printed circuit boards are conformal coated to ensure the highest reliability. Heat sink style fins on the top and bottom of the unit ensure the unit will meet its temperature specifications without any forced air cooling, though the unit is also suitable for use with a cold plate if appropriate.

The DNR-MIL-6 is available in different deployment options, including: PowerDNA, UEIPAC, UEIMODBUS, UEISIM and UEIOPCUA.

POWERDNA: DNR-MIL-6

In PowerDNA mode, the RACKangle operates as a slave I/O device, running under the control of a host PC. All application code in this mode is created and run on the host. PowerDNR mode offers almost unprecedented software support, including:

- All popular operating systems, including Windows, Linux, VxWorks, QNX, RTX and InTime
- All popular programming languages, including VB, VB.NET, C, C#, C++, JAVA
- All popular application packages, including MATLAB, Simulink, LabVIEW, and more

UEIPAC 600-MIL

When deployed as a UEIPAC, the standard firmware running on a RACKangle is replaced by either a Linux or VxWorks operating system. The user then writes the Linux/VxWorks application that runs on the DNR-MIL-6. In this mode, the DNR-MIL-6 can run fully standalone, or may be linked to a SCADA host via the Ethernet.

UEISIM 600-MIL

Simulink users will appreciate the ability to build models in Simulink, compile them in Embedded Coder and then deploy them on the UEISIM hardware. It's an ideal platform for testing models on actual hardware. Once the model is proven, it can be deployed using the exact same hardware.

UEIMODBUS 600-MIL

Users needing a compact, rugged Modbus TCP I/O slave will appreciate UEIMODBUS. The

rugged, IP66/NEMA6 sealed DNR-MIL-6 allows you to deploy your I/O system in the field, without any additional enclosure and protection.

UEIOPCUA 600-MIL

The rugged UEIOPC 600-MIL acts as a standalone OPC-UA server (not dependent on Windows), supporting the OPC-UA Historian functionality. System configuration is made easy by an intuitive, easy to use web/HTML interface.

The DNR-MIL-6 platform is 100% COTS, made in the USA and supported by UEI's family of over 90 compatible analog, digital and interface I/O boards, including analog inputs up to 24-bits, thermocouples, RTDs, ICP/IEPE, ARINC-429/453/708, MIL-STD-1553, CAN, RVDT/LVDT, synchro/resolver, RS-232/422/485, strain gauge, quadrature encoder, high-voltage analog outputs (up to 115 VDC) with high drive analog output (up to 200 mA), function generator outputs and more.

Whether your application is on a ship or boat, in an aircraft, in a rocket, on an outdoor test cell, on an oil platform or simply going to be left outside and exposed to the elements, the DNR-MIL-6 is an ideal solution. Of course if you need fewer I/O, you should consider the 4-slot 6.2" W x 8.7" D x 7.1" H x DNA-MIL Cube, which offers many of the same features and options, but offers slots for up to 4 I/O boards in a smaller chassis. If you need more I/O, please consider the DNR-MIL, which offers identical electronic features, but is larger and provides 12 I/O slots.

TECHNICAL SPECIFICATIONS

DNR-MIL-6 (Power DNA mode)

Computer Interface	MIL Series Ruggedized Chassis
Primary Ethernet port	10/100/1000Base-T, 38999 connector
Diagnostic port	10/100/1000Base-T, 38999 connector
Configuration/serial port	RS-232, 38999 connector
Synchronization options	1. IEEE-1588/PTP; 2. DNR-SYNC-1G series cables and boards provide both clock and trigger sync signals; 3. DNR-IRIG-650 board provides IRIG and GPS time synchronization
I/O Board Support	
Series supported	All DNR-series boards
Processor/system	
CPU	Freescall 8347, 400 MHz, 32-bit
Memory (RAM)	256 MB
Memory (Flash)	32 MB
Host Communications	
Distance from host	100 meters maximum, CAT5/6 cable
Ethernet data transfer rate	20 MB/s
Analog data transfer rate	>6 MS/s. Capable of sustained transfer in any RACKangle configuration
DMAP/VMAP real-time I/O mode	Update >1,000 I/O channels at 4 kHz, guaranteed
Physical Dimensions/Weight	
6 I/O slots	11.6" W x 6.4" D x 7.0" H, 16 lbs. including I/O boards
Environmental	
Electrical Isolation	350 Vrms
Temperature (operating)	-40 °C to 70 °C
Temperature (storage)	-40 °C to 70 °C
Humidity	0 to 95%, non-condensing
Vibration	MIL-STD-810 G plus the IEC standards below
(IEC 60068-2-64)	10–500 Hz, 5 g (rms), broadband random
(IEC 60068-2-6)	10–500 Hz, 5 g, sinusoidal
Shock	MIL-STD-810 G plus the IEC standards below
(IEC 60068-2-27)	100 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations
Altitude	70,000 feet, maximum
EMI/RFI	Designed to meet MIL-STD-461
Sealing	Default unit sealed to IP 66 or better. Pressure relief valves support continuous altitude changes of 5000 fpm. Units can be configured with bottom weep holes if desired.
Power Requirements	
Voltage	9–36 VDC (115/220 VAC adaptor available)
Power	12 W (not including I/O boards)
Power Quality requirement	Designed to meet MIL-STD-704/1275
Reliability	
MTBF	100,000 hours

UEIPAC 600-MIL

Computer Interface	MIL Series Ruggedized Chassis
Primary Ethernet port	10/100/1000Base-T, 38999 connector
Diagnostic port*	10/100/1000Base-T, 38999 connector *Alternatively can be teamed/bonded with primary port.
Configuration/serial port	RS-232, 38999 connector
USB port	USB 2.0 fully supported
Synchronization options	1. DNR-SYNC-1G series cables and boards provide both clock and trigger sync signals 2. DNR-IRIG-650 board provides IRIG and GPS time synchronization 3. PTP client provides software implementation of IEEE-1588
I/O Board Support	
Series supported	All DNR-series boards
Software / Operating System	
Embedded OS	Linux kernel 5.4.x (VxWorks Available)
Real-time support	Linux RT or VxWorks support
Development language	C/C++, Eclipse IDE support
Development environments	Linux PC or Cygwin Windows environment
EPICS CAS interface	Yes
SNMP library	Yes
OS royalties	None
Processor/system	
CPU	Freescall 8347, 400 MHz, 32-bit
Memory	256 MB (128 MB available for application software)
FLASH memory	32 MB (16 MB available for user applications)
Solid state hard drive	Up to 64 GByte
USB drive interface	Standard USB 2.0 port
Physical Dimensions/Weight	
6 I/O slots	11.6" W x 6.4" D x 7.0" H, 16 lbs. including I/O boards
Environmental	
Electrical isolation	350 Vrms
Temperature (operating)	-40 °C to 70 °C
Temperature (storage)	-40 °C to 70 °C
Humidity	0 to 95%, non-condensing
Vibration	MIL-STD-810G plus the IEC standards below
(IEC 60068-2-64)	10–500 Hz, 5 g (rms), broadband random
(IEC 60068-2-6)	10–500 Hz, 5 g, sinusoidal
Shock	MIL-STD-810G plus the IEC standards below
(IEC 60068-2-27)	100 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations
Altitude	70,000 feet, maximum
EMI/RFI	Designed to meet MIL-STD-461
Sealing	Default unit sealed to IP 66 or better. Pressure relief valves support continuous altitude changes of 5000 fpm. Units can be configured with bottom weep holes if desired.
Power Requirements	
Voltage	9–36 VDC (115/220 VAC adaptor available)
Power	12 W (not including I/O boards)
Power quality requirement	Designed to meet MIL-STD-704/1275
Reliability	
MTBF	100,000 hours

TECHNICAL SPECIFICATIONS

UEIMODBUS 600-MIL

Computer Interface		MIL series ruggedized chassis	
Primary Ethernet Port		10/100/1000Base-T, 38999 connector	
Diagnostic Port		10/100/1000Base-T, 38999 connector	
Net Teaming/bonding		Supported	
Configuration/Serial Port		on LAN/COM 38999 connector	
USB Port		n/a on UEIModbus	
I/O Board Support			
Series supported		All DNR series boards	
Software / Operating System			
Embedded OS		Linux, kernel 4.4.89	
Real-time support		Standard Linux kernel	
Processor/system			
CPU		Freescale 8347 or 8347E, 400 MHz, 32-bit	
Memory		256 MB, 228 MB available to user applications	
FLASH memory		32 MB standard / 128 MB optional 6 MB/112 MB available for user applications	
Solid-State Hard Drive		Optional 8 or 16 GByte drives available*	
SD card interface		SD cards up to 32 GByte	
Physical Dimensions/Weight			
6 I/O slots		11.6" W x 6.4" D x 7.0" H, 16 lbs. including I/O boards	
Environmental			
Temperature (operating)		-40 °C to 85 °C (power dissipation of actual system may require derated maximum temperature)	
Temperature (storage)		-40 °C to 85 °C	
Humidity		0 to 95%, non-condensing	
Vibration		MIL-STD-810G plus the IEC standards below	
	(IEC 60068-2-64)	10–500 Hz, 5 g (rms), broadband random	
	(IEC 60068-2-6)	10–500 Hz, 5 g, sinusoidal	
Shock		MIL-STD-810G plus the IEC standards below	
	(IEC 60068-2-27)	100 g, 3 ms half sine, 18 shocks at 6 orientations 30 g, 11 ms half sine, 18 shocks at 6 orientations	
Altitude		70,000 feet, maximum	
EMI/RFI		Designed to meet MIL-STD-461	
Sealing		Default unit sealed to IP 66 or better. Pressure relief valves support continuous altitude changes of 5000 fpm. Units can be configured with bottom weep holes if desired.	
Power Requirements			
Voltage		9–36 VDC designed to meet MIL-STD-1275/704	
Reliability			
MTBF		>100,000 hours	

*The SD cards and SSD devices used are not built by UEI. As we do not control the source, we cannot offer our 10-year availability guarantee on these devices.

UEISIM 600-MIL

Computer Interface		MIL series ruggedized chassis	
Primary Ethernet Port		10/100/1000Base-T, 38999 connector	
Diagnostic Port		10/100/1000Base-T, 38999 connector	
Net Teaming/bonding		Supported in Linux OS	
Configuration/Serial Port		on LAN/COM 38999 connector	
USB Port		USB 2.0 fully supported	
I/O Board Support			
Series supported		All DNR series boards	
Software / Operating System			
Embedded OS		Linux, kernel 4.4.89	
Real-time support		Xenomai RTOS is supported in Linux, but file I/O is not available	
EPICS CAS interface		Yes (Linux version)	
SNMP Library		Yes	
Processor/system			
CPU		Freescale 8347 or 8347E, 400 MHz, 32-bit	
Memory		256 MB, 228 MB available to user applications	
FLASH memory		32 MB standard / 128 MB optional 6 MB / 112 MB available for user applications	
Solid-State Hard Drive*		Optional 8 or 16 GByte drives available	
SD card interface*		SD cards up to 32 GByte	
USB drive interface		Standard USB 2.0 port	
Physical Dimensions/Weight			
6 I/O slots		11.6" W x 6.4" D x 7.0" H, 16 lbs. including I/O boards	
Environmental			
Temperature (operating)		-40 °C to 85 °C (power dissipation of actual system may require derated maximum temperature)	
Temperature (storage)		-40 °C to 85 °C	
Humidity		0 to 95%, non-condensing	
Vibration		MIL-STD-810G plus the IEC standards below	
	(IEC 60068-2-64)	10–500 Hz, 5 g (rms), broadband random	
	(IEC 60068-2-6)	10–500 Hz, 5 g, sinusoidal	
Shock		MIL-STD-810G plus the IEC standards below	
	(IEC 60068-2-27)	100 g, 3 ms half sine, 18 shocks at 6 orientations 30 g, 11 ms half sine, 18 shocks at 6 orientations	
Altitude		70,000 feet, maximum	
EMI/RFI		Designed to meet MIL-STD-461	
Sealing		Default unit sealed to IP 66 or better. Pressure relief valves support continuous altitude changes of 5000 fpm. Units can be configured with bottom weep holes if desired.	
Power Requirements			
Voltage		9–36 VDC designed to meet MIL-STD-1275/704	
Reliability			
MTBF		>100,000 hours	

*The SD cards and SSD devices used are not built by UEI. As we do not control the source, we cannot offer our 10-year availability guarantee on these devices.

TECHNICAL SPECIFICATIONS

UEIOPCUA 600-MIL

Computer Interface		MIL series ruggedized chassis	
Primary Ethernet Port		10/100/1000Base-T, 38999 connector	
Diagnostic Port		10/100/1000Base-T, 38999 connector	
Net Teaming/bonding		Supported	
Configuration/Serial Port		on LAN/COM 38999 connector	
USB Port		n/a on UEIOPC-UA	
I/O Board Support			
Series supported		All DNR-series boards	
Software/Operating System			
Embedded OS		Linux, kernel 4.4.89	
Real-time support		Standard Linux kernel	
Processor/system			
CPU		Freescale 8347 or 8347E, 400 MHz, 32-bit	
Memory		256 MB, 228 MB available to user applications	
FLASH memory		32 MB standard/128 MB optional 6 MB/112 MB available for user applications	
Solid-State Hard Drive		Optional 8 or 16 GByte drives available*	
SD card interface		SD cards up to 32 GByte	
Physical Dimensions/Weight			
6 I/O slots		11.6" W x 6.4" D x 7.0" H, 16 lbs. including I/O boards	
Environmental			
Temperature (operating)		-40 °C to 85 °C (power dissipation of actual system may require derated maximum temperature)	
Temperature (storage)		-40 °C to 85 °C	
Humidity		0 to 95%, non-condensing	
Vibration		MIL-STD-810G plus the IEC standards below	
	(IEC 60068-2-64)	10–500 Hz, 5 g (rms), broadband random	
	(IEC 60068-2-6)	10–500 Hz, 5 g, sinusoidal	
Shock		MIL-STD-810G plus the IEC standards below	
	(IEC 60068-2-27)	100 g, 3 ms half sine, 18 shocks at 6 orientations 30 g, 11 ms half sine, 18 shocks at 6 orientations	
Altitude		70,000 feet, maximum	
EMI/RFI		Designed to meet MIL-STD-461	
Sealing		Default unit sealed to IP 66 or better. Pressure relief valves support continuous altitude changes of 5000 fpm. Units can be configured with bottom weep holes if desired.	
Power Requirements			
Voltage		9–36 VDC designed to meet MIL-STD-1275/704	
Reliability			
MTBF		>100,000 hours	

*The SD cards and SSD devices used are not built by UEI. As we do not control the source, we cannot offer our 10-year availability guarantee on these devices.

CABLES, CONNECTORS & SCREW TERMINAL PANELS

CONNECTORS

All connections to the DNR-MIL-4 are made through standard, COTS, nickel plated 38999 connectors. I/O board connections are made through 128-pin connectors where each I/O board utilizes up to 62 of the 128 pins. The Ethernet, USB, diagnostic Serial, Sync, and hardware reset connections are via 37-pin connectors. Power supply and an auxiliary synch bus connections are through a 13-pin connector. Optional keying is available on the 128 pin, I/O connectors. For keying order:

DNA-38999-KEY: Clocked/keyed I/O connectors (N, A keys)

CABLES

Though most customers will design custom cables for their deployed systems, customers working on prototypes and/or those building “one off” systems may desire the ability to connect to the DNR-MIL-4 using more traditional, commercial connections (e.g. RJ-45 for the Ethernet ports).

For these customers, UEI offers a complete array of cables and screw terminal panels that will provide direct access to all signals routed in and out of the chassis.

LAN/Power Cables

■ DNA-CBL-LAN-06 Communications cable

6 foot cable connecting the 37-pin LAN/COM/USB port connector to standard commercial connectors. Ethernet ports come out to RJ-45, the serial port to a DB-9 and the USB ports to standard USB jacks.

■ DNA-CBL-1315-03 Power supply cable

Connects the 13-pin power/sync connector to a standard female DB-15 connector.

I/O board cables

Each 128 pin I/O 38999 connector provides the I/O connectivity for two I/O slots within the DNR-MIL-4. UEI I/O boards utilize either 37- or 62-pin D connectors and these connectors are mapped as follows.

The left I/O slot (even slot #) maps to pins 1–62 on the 128 pin 38999. The right I/O slot (even slot #) is mapped to pins 65–126 on the 38999. Note that the 37-pin based boards simply do not use pins 38–62. For this reason, most applications can standardize on 62-pin cables and screw terminal panels and simply ignore “no connection” pins. The exception to this is the STP boards that have been specifically designed for use with 37-pin boards (e.g. DNA-STP-207TC). For these boards 37-pin are also available. Also, as some I/O slots may not be utilized in a given application, cables with a single 37-pin or 62-pin D connector are also available.

The following cables provide the same I/O connectivity as the standard, commercial DNA-CBL-37S and DNA-CBL-62 series cables.

■ DNA-CBL-12862-5 5 ft male 128-pin 38999 to 2x DB-62M

■ DNA-CBL-12837-5 5 ft male 128-pin 38999 to 2x DB-37F

■ DNA-CBL-6237M-3 3 ft male RoHS 128-pin 38999 to 1x DB-37F and 1x DB-62M

■ DNA-CBL-62M-03 3 ft male 128-pin 38999 to 1x DB-62M

■ DNA-CBL-37M-03 3 ft male 128-pin 38999 to 1x DB-37F

SCREW TERMINAL PANELS

■ DNA-STP-37

Standard 37-pin screw terminal panel, suitable for use with all 37-pin I/O boards and cables.

■ DNA-STP-62


Standard 62-pin screw terminal panel, suitable for use with all 62-pin I/O boards and cables.

■ DNA-STP-3762

Standard 37-pin screw terminal panel, providing both 37- and 62-pin connectors and suitable for use with any combination of I/O board.

38999 CONNECTOR PINOUTS

128-pin I/O—mating connector required: D38999/26FJ35PN

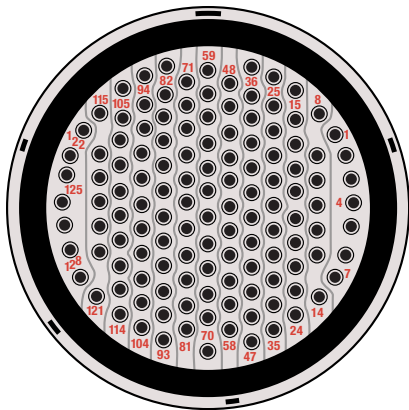

Pin #	I/O slot	Board Pin
1	2 / 4	1
2	2 / 4	2
3	2 / 4	3
4	2 / 4	4
5	2 / 4	5
6	2 / 4	6
7	2 / 4	7
8	2 / 4	8
9	2 / 4	9
10	2 / 4	10
11	2 / 4	11
12	2 / 4	12
13	2 / 4	13
14	2 / 4	14
15	2 / 4	15
16	2 / 4	16
17	2 / 4	17
18	2 / 4	18
19	2 / 4	19
20	2 / 4	20
21	2 / 4	21
22	2 / 4	22
23	2 / 4	23


Pin #	I/O slot	Board Pin
24	2 / 4	24
25	2 / 4	25
26	2 / 4	26
27	2 / 4	27
28	2 / 4	28
29	2 / 4	29
30	2 / 4	30
31	2 / 4	31
32	2 / 4	32
33	2 / 4	33
34	2 / 4	34
35	2 / 4	35
36	2 / 4	36
37	2 / 4	37
38*	2 / 4	38
39	2 / 4	39
40	2 / 4	40
41	2 / 4	41
42	2 / 4	42
43	2 / 4	43
44	2 / 4	44
45	2 / 4	45
46	2 / 4	46

Pin #	I/O slot	Board Pin
47	2 / 4	47
48	2 / 4	48
49	2 / 4	49
50	2 / 4	50
51	2 / 4	51
52	2 / 4	52
53	2 / 4	53
54	2 / 4	54
55	2 / 4	55
56	2 / 4	56
57	2 / 4	57
58	2 / 4	58
59	2 / 4	59
60	2 / 4	60
61	2 / 4	61
62	2 / 4	62
63	n/a	n/a
64	n/a	n/a
65	1 / 3	1
66	1 / 3	2
67	1 / 3	3
68	1 / 3	4
69	1 / 3	5
70	1 / 3	6
71	1 / 3	7
72	1 / 3	8
73	1 / 3	9
74	1 / 3	10
75	1 / 3	11
76	1 / 3	12
77	1 / 3	13
78	1 / 3	14
79	1 / 3	15
80	1 / 3	16
81	1 / 3	17
82	1 / 3	18
83	1 / 3	19
84	1 / 3	20
85	1 / 3	21
86	1 / 3	22
87	1 / 3	23

Pin #	I/O slot	Board Pin
88	1 / 3	24
89	1 / 3	25
90	1 / 3	26
91	1 / 3	27
92	1 / 3	28
93	1 / 3	29
94	1 / 3	30
95	1 / 3	31
96	1 / 3	32
97	1 / 3	33
98	1 / 3	34
99	1 / 3	35
100	1 / 3	36
101	1 / 3	37
102	1 / 3	38
103	1 / 3	39
104	1 / 3	40
105	1 / 3	41
106	1 / 3	42
107	1 / 3	43
108	1 / 3	44
109	1 / 3	45
110	1 / 3	46
111	1 / 3	47
112	1 / 3	48
113	1 / 3	49
114	1 / 3	50
115	1 / 3	51
116	1 / 3	52
117	1 / 3	53
118	1 / 3	54
119	1 / 3	55
120	1 / 3	56
121	1 / 3	57
122	1 / 3	58
123	1 / 3	59
124	1 / 3	60
125	1 / 3	61
126	1 / 3	62
127	-	n/a
128	-	n/a

Pins 38–62 are not applicable if I/O slot 1 contains a 37-pin board

37-pin LAN / COM port—mating connector required: D38999/26WD35PN

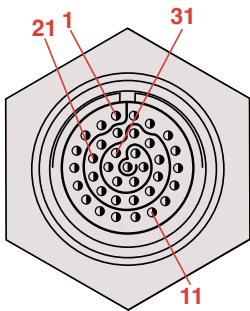


Pin number	Pin designation
1	LAN0 TX+ / DA+
2	LAN0 RX+ / DB+
3	LAN0 nc / DC-
4	LAN0 nc / DD+
5	Shield
6	Lan1 TX+ / DA+
7	LAN1 RX+ / DB+
8	LAN1 nc / DC-
9	LAN1 nc / DD+
10	Shield
11	Misc In
12	USB1 P+
13	USB1 D+

Pin number	Pin designation
14	USB2 P+
15	USB2 P-
16	USB2 D+
17	USB2 D-
18	LAN0 TX- / DA-
19	LAN0 nc / DC+
20	LAN0 RX- / DB-
21	LAN0 nc / DD-
22	LAN1 TX- / DA-
23	LAN1 nc / DC+
24	LAN1 RX- / DB-
25	LAN1 nc / DD-
26	Misc Out

Pin number	Pin designation
27	USB1 P-
28	USB1 D-
29	Sync Clock Out
30	Sync Trig Out
31	RS232 TX
32	RS232 RX
33	RS232 GND
34	Sync Clock In
35	Sync Trig In
36	Sync +5V
37	Sync Gnd

13-pin power connector—
mating connector required: D38999/26FB35PN



Pin #	Pin Designation
1	GND
2	GND
3	GND
4	Vcc (9-36 VDC)
5	Vcc (9-36 VDC)
6	Vcc (9-36 VDC)
7	Sync In2/reset
8	Sync In0
9	Sync In1
10	Sync Gnd
11	Sync Out1
12	Sync +5V
13	Sync Out0