


STP and Cable Kit for UEI-PIO-1010 and MF-101 products

DNA-MF-CBL-STP

KEY FEATURES

- Bundle of the STP-MF-101 and CBL-MF-101

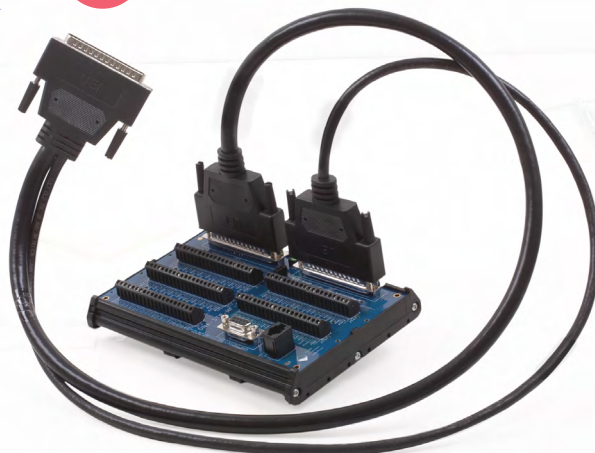

General Description

A bundled kit for both the UEI-PIO-1010 and DNx-MF-101 board that contains the STP-MF-101 screw terminal panel and CBL-MF-101 cable which allows for simple connections to all MF-101 signals in both products.

Technical Specifications

DNA-STP-MF-101	
Connectors	DB-37 - 37-pin male D-Sub; DB-62 - 62-pin female D-Sub; 62-position terminal blocks
Operating/Storage Temp	-40°C to 85°C
Output Current	2.7 A max (65 Watts, max)
Short Circuit Protected	Yes

Ordering Information

Product	Description
DNA-MF-CBL-STP	STP and Cable Kit for Panel I/O and MF-101 products

Related Products

Product	Description
UEI-PIO-1010	Panel I/O – Processor and Multifunction I/O board with 16 A/D, 2 D/A, 20 DIO, one I ² C and one RS-232/422/485 port
DNx-MF-101	Multifunction I/O board with 16 A/D, 2 D/A, 20 DIO, one I ² C and one RS-232/422/485 port
DNA-CBL-MF-101	3ft, 62-pin to 37/62 port shielded cable
Extended Warranty	Option to purchase UEI's extended 3-5 year warranty is available