


# DNx-SL-501

## RS-232/485 Serial Communications Interface

- DNA-/DNR-/DNF-SL-501 for use with Cube/RACKtangle™/ FLATRACK™ I/O chassis
- 4 independent ports with custom baud rates per port
- Arbitrary baud rate selection (0.01% accuracy)
- Maximum speed of 256 Kb/s for RS-232 and 2 Mb/s for RS-485
- J1587/J1708 support included
- Each port is software-configurable as RS-232 or RS-485
- Completely independent bit rate settings for every port
- 350 V isolation between ports, ports and circuitry; 15 kV ESD
- Compatible with RS-422 networks when used in RS-485 mode

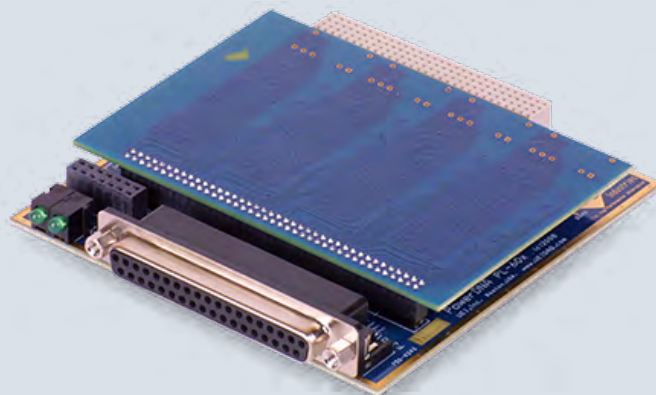

## GENERAL DESCRIPTION

The DNx-SL-501 are 4-port serial communications layers for UEI's powerful Cube, RACKtangle and FLATRACK I/O chassis. The boards offer fully isolated serial interfaces, software-configurable as RS-232 or RS-485.

DNx-SL-501 supports up to 2 Mb/s transfer speed in RS-485 mode or up to 256 Kb/s in RS-232 mode. A special version of the board, designated as the DNx-SL-501-804, supports baud rates up to 4 Mb/s. The boards use a 16550C UART emulation on each port (FIFO mode only) and support half- and full-duplex mode over RS-485.

The DNx-SL-501 is compatible with RS-422 networks when used in RS-485 mode. The layer provides 200  $\Omega$  software-selectable TX and/or RX termination for RS-485 communications. The DNx-SL-501 is an ideal solution for connecting serial based data acquisition devices to the Ethernet, as well as interfacing to a wide variety of serial based devices and legacy

DAQ systems. In addition to standard serial I/O features, the DNx-SL-501 offers a series of additional functions. These functions include:

- Fully customizable baud rates generated by programmable PLL on per-channel basis from 300 baud to 2 Mbaud
- Programmable inter-character delay (required to drive/simulate some avionics instruments)
- Programmable inter-frame delay (used to schedule frames at different rate)
- Automatic repeat of the last frame if new data is not sent from the host on time (required to keep "inop" flag happy on many avionic devices)
- None/Even/Odd/Space/Mark parity in 8-bit mode and per-symbol programmable in 9-bit mode
- Automatic in-hardware or software flow control
- Asynchronous event mode with loop closure in 100 $\mu$ s (for avionics expecting immediate reply)

- Echo suppression in half-duplex mode (for 422 mode)
- Timeout programmable in 10 $\mu$ s, 100 $\mu$ s or 1ms intervals

Software is included, providing a comprehensive, yet easy-to-use API that supports all popular operating systems, including Windows, Linux, and most real-time operating systems—such as QNX, Intime, VXworks, and more. Additionally, the UEIDAQ Framework—an even higher level Windows driver—supplies complete support for those creating applications in many popular Windows programming languages, as well as data acquisition software packages such as LabVIEW and MATLAB/Simulink.

Finally, the DNx-SL-501-804 includes the UEI-RSS Remote Serial Server. The RSS allows the SL-501 slots to be configured as standard "Com" ports in both Windows and Linux environments.

## TECHNICAL SPECIFICATIONS

General Serial Specifications	
Number ports	4
Serial Interfaces	RS-232, RS-485(RS-422), per-port software-configurable
<b>Maximum Speed</b>	
RS-232	256 Kb/s
RS-485	2 Mb/s (A special version of the product, the DNx-SL-501-804 supports up to 4 Mb/s)
Baud rate selection	Any rate from 300 baud to 2 Mbaud, with 0.01% accuracy
<b>Supported Modes:</b>	
RS-232	
RS-485	Half- and -full-duplex
RS-232/485 Transceiver	MAX3160E (w/ fail-safe RS-485 RX termination)
UART Controller	16550C emulation (w/ extended parity control)
Protection	350 V channel-to-channel; 15 kV ESD protection
Power Consumption	2.5 W (RS-485 mode with max current drive)
Operating Temperature	Tested -40 to +85 °C
Operating Humidity	0 - 95%, non-condensing

Continued ►

## TECHNICAL SPECIFICATIONS *Continued*


UART Controller	
Base Clock	66 MHz, 24 MHz, custom
FIFO Size	2048 (input and output)
Error Detection	interrupts-based, 4 per port
Dedicated Port Interrupts	UART interrupt, Timeout interrupt, TX/RX FIFO interrupt
General and Environmental	
Isolation	350 Vrms port-to-port and port-to-chassis
Power Consumption	2.0 W (not including output loads)
Operating Temperature (tested)	-40 °C to +85 °C
Operating Humidity	95%, non-condensing
Vibration	
<div>IEC 60068-2-62</div>	5 g, 10-500 Hz, sinusoidal
<div>IEC 60068-2-64</div>	5 g, 10-500 Hz, sinusoidal
Configuration/Serial Port	RS-232, 38999 connector
Shock—IEC 60068-2-27	100 g, 3 ms half sine, 18 shocks @ 6 orientations; 30 g, 11 ms half sine, 18 shocks @ 6 orientations
MTBF	350,000 hours
Altitude	120,000 FT

## PINOUT DIAGRAM


DB-37 (female)  
37-PIN CONNECTOR

	J1	DB-9*	RS-232	RS-485
Serial Port 1	19	> 3	TXD1	TX1-
	37	> 2	RXD1	RX1+
	18	> 7	RTS1	TX1+
	36	> 8	CTS1	RX1-
	17	- 6	-	-
	35	> 5	GND1	GND1
	16	- 4	-	-
	34	- 1	-	-
	15	- 9	-	-
Serial Port 2	33	> 3	TXD2	TX2-
	14	> 2	RXD2	RX2+
	32	> 7	RTS2	TX2+
	13	> 8	CTS2	RX2-
	31	- 6	-	-
	12	> 5	GND2	GND2
	30	- 4	-	-
	11	- 1	-	-
	29	- 9	-	-
Serial Port 4	10	> 3	TXD4	TX4-
	28	> 2	RXD4	RX4+
	9	> 7	RTS4	TX4+
	27	> 8	CTS4	RX4-
	8	- 6	-	-
	26	> 5	GND4	GND4
	7	- 4	-	-
	25	- 1	-	-
	6	- 9	-	-
Serial Port 3	24	> 3	TXD3	TX3-
	5	> 2	RXD3	RX3+
	23	> 7	RTS3	TX3+
	4	> 8	CTS3	RX3-
	22	- 6	-	-
	3	> 5	GND3	GND3
	21	- 4	-	-
	2	- 1	-	-
	20	- 9	-	-
	1	-	-	-

<b>GNDx</b>	Isolated ground for the corresponding serial port
<b>TXDx/RXDx</b>	RS-232: Transmit/Receive
<b>RTSx/CTSx</b>	RS-232: request to Send/Clear to Send
<b>TXx+/TXx-</b>	RS-485: Transmit pair
<b>RXx+/RXx-</b>	RS-485: Receive pair
-	no internal connection



BLOCK DIAGRAM

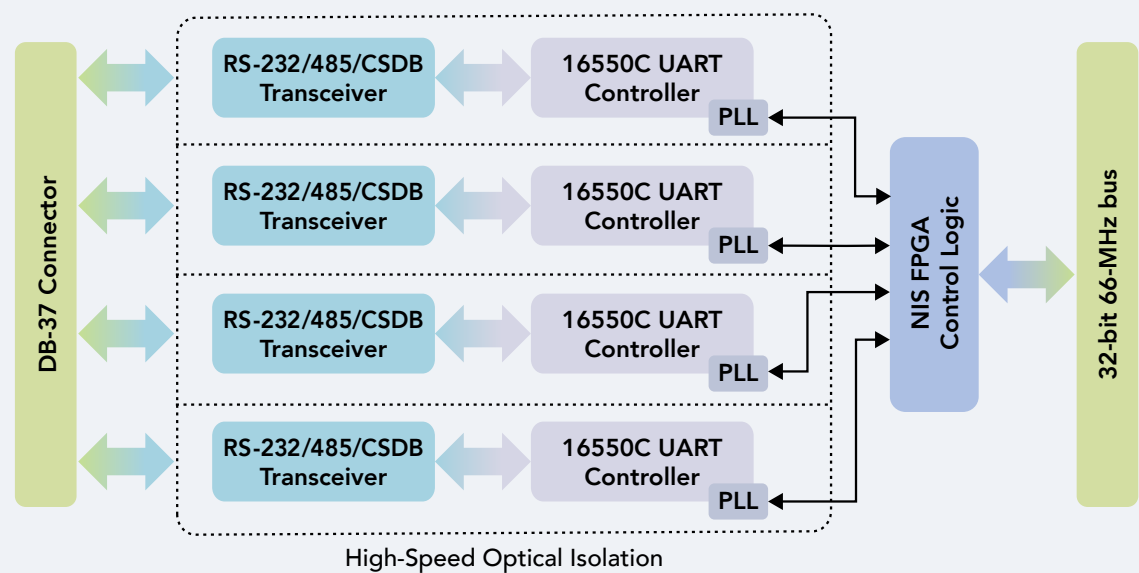

ORDERING GUIDE

To place an order, you can build an estimate online at [www.ueidaq.com](http://www.ueidaq.com), or contact us at 508-921-4600 or [uei.sales@ametek.com](mailto:uei.sales@ametek.com).

Part #	Description
<a href="#">DNx-SL-501</a>	RS-232/485 Serial Communications Interface
<a href="#">DNA-CBL-COM</a>	1ft. DB37 cable split into four DB9 connectors
<a href="#">DNA-CBL-37S</a>	3ft, 37-way round shielded cable
<a href="#">DNA-STP-37</a>	37-channel screw terminal panel
<a href="#">DNA-STP-3762</a>	Universal Screw Terminal Panel for DNx-Series I/O
<a href="#">DNA-STP-37-DR</a>	37-pos Terminal Panel for PowerDNA Layers
<a href="#">UEI-RSS</a>	Standard Serial Server for DNx-SL-501 and DNx-SL-508; included with DNx-SL-501/508 purchase
<a href="#">Extended Warranty</a>	Option to purchase UEI's extended warranty (up to 10 years) is available