

# OPC-UA I/O Solutions

**Powerful, Robust and Easy-to-Use**

- Powerful I/O platform runs from your OPC-UA server
- Supported by all of UEI's popular Cube and RACKtangle chassis
- Flexible, compact and rugged
- Web/HTML configuration
- Flexible: Over 50 I/O boards available
- Remote connections possible through VPN and Firewalls
- 100Base-T, 100Base-FX (fiber), or Gigabit Ethernet
- Supports the OPC-UA Historian functionality
- 10-year availability Guarantee



**OPC-UA support  
is available on  
all UEI's chassis!**



## General Description

UEI's OPC-UA compatible I/O product family has been designated the UEI-OPC-UA series. It offers an unprecedented combination of flexibility, high performance, low cost, ruggedness and small size, all fully supported by your standard OPC-UA host. The OPC-UA functionality is available on all of UEI's popular Cube and RACKtangle form factors.

UEI-OPC-UA series supports the following profiles and facets

**Server Profile:** Embedded UA Server profile

**Transport Profile:** UA-TCP, UA-SC, UA Binary

**Security Profiles:** SecurityPolicy - Basic256Sha256, SecurityPolicy - Basic256 and SecurityPolicy - None

**Access Types:** Data Access, Historical Data Access

System configuration is made easy by the UEI-OPC-UA's intuitive, easy to use web/HTML interface. A screen capture of the web interface is shown on the following page. The web interface also supports the OPC-UA Historian functionality.

There are currently over 50 different I/O boards available providing the functions shown in the column to the right:

### Input Boards

- 0–20/4–20 mA output
- Thermocouple input
- RTD input
- Strain and Wheatstone Bridge input
- Voltage input
- Digital I/O
- Speed/Frequency Input
- Quadrature Encoder Input


### Output Boards

- 0–20/4–20 mA output
- Voltage output
- Digital Output
- Relay Output
- plus many more.


With this many different I/O boards available, there is sure to be a configuration perfect for your application.

OPC-UA systems are ideal solutions in a wide variety of measurement and control applications in industries such as: Oil & Gas, Automotive, Energy Systems, Food & Beverage, Water Treatment, Chemical Processing and many more!

## Block Diagrams

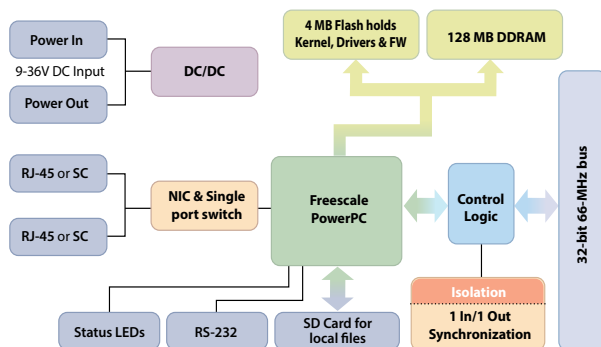

100 Base-T Cubes

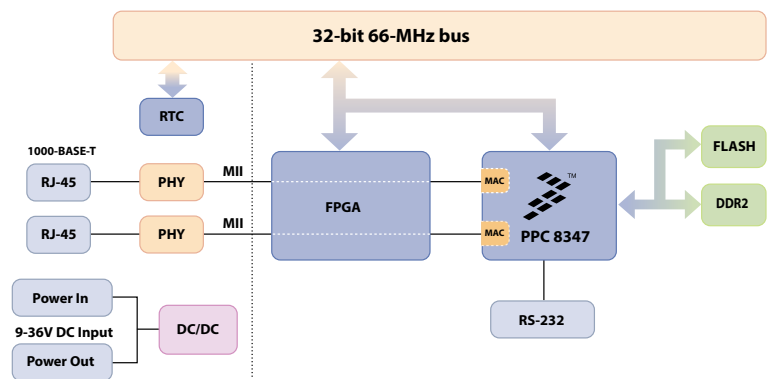

GigE Cubes and RACKtangles

## Example Configuration Screen

United Electronic Industries  
AMETEK

UEIOPC model: 3006  
 UEIOPC serial: 74181  
 status: Running  
 OPC Server Software version: 1.0.0.1

Start OPC server Stop OPC server Save configuration ☐ Autostart OPC server after power-up

**Channels** Timing

| Device  | Channels | Id                | Name                                | Enable       | Measurement  | Input mode   | Input range | Parameters           |                    |                    |  |
|---|----------|-------------------|-------------------------------------|--------------|--------------|--------------|-------------|----------------------|--------------------|--------------------|--|
| AI-218<br>AI-212<br>CT-601<br>VR-608<br>DIO-403 | 0        | Device1/Channel0  | <input checked="" type="checkbox"/> | thermocouple | Differential | -2.048/2.048 | TC type: E  | Temp. scale: Celsius | CJC type: Built-in | CJC constant: 25.0 |  |
|   | 1        | Device1/Channel1  | <input checked="" type="checkbox"/> | thermocouple | Differential | -2.048/2.048 | TC type: E  | Temp. scale: Celsius | CJC type: Built-in | CJC constant: 25.0 |  |
|   | 2        | Device1/Channel2  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 3        | Device1/Channel3  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 4        | Device1/Channel4  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 5        | Device1/Channel5  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 6        | Device1/Channel6  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 7        | Device1/Channel7  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 8        | Device1/Channel8  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 9        | Device1/Channel9  | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 10       | Device1/Channel10 | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |
|   | 11       | Device1/Channel11 | <input type="checkbox"/>            | voltage      | Differential | -2.048/2.048 |             |                      |                    |                    |  |

UEI's OPC-UA web based I/O configuration tool makes it very easy to configure your system and prepare it to connect to your OPC-UA server. The web based tool also allows you to select the channels you wish to store in the Historian for future reference.

# UEIOPC-UA: Technical Specifications

| Computer Interface                 | UEIOPC-UA xxx series Cubes  | UEIOPC-UA xxx-1G series GigE Cubes   | UEIOPC-UA RACKtangle Chassis   |
|------------------------------------|---|--|--|
| Primary Ethernet Port              | 10/100Base-T, RJ-45 connector   | 10/100/1000Base-T, RJ-45 connector   | 10/100/1000Base-T, RJ-45 connector   |
| Diagnostic Port                    | Not applicable  | 10/100/1000Base-T, RJ-45 connector   | 10/100/1000Base-T, RJ-45 connector   |
| Other Port Functions               | Daisy chained single port switch provided   | Ports may optionally be bonded/teamed  | Ports may optionally be bonded/teamed  |
| Optional Interface                 | 100Base-FX Fiber (single or multi-mode)   | n/a  | n/a  |
| Configuration/Serial Port          | RS-232, 9-pin "D"   | RS-232, 9-pin "D"  | RS-232, 9-pin "D"  |
| USB Port                           | Not supported   | Not supported  | Not supported  |
| <b>I/O Board Support</b>           |   |  |  |
| Series supported                   | DNA-series boards   | DNA-series boards  | DNR-series boards (DNF for FLATrack)   |
| <b>Software / Operating System</b> |   |  |  |
| Embedded OS                        | Linux, kernel 4.4.89  | Linux, kernel 4.4.89   | Linux, kernel 4.4.89   |
| <b>Processor / System</b>          |   |  |  |
| CPU                                | Freescall MPC5200, 400 MHz, 32-bit  | Freescall 8347 or 8347E, 400 MHz, 32-bit   | Freescall 8347 or 8347E, 400 MHz, 32-bit   |
| RAM Memory                         | 128 MB, 100 MB available to user applications   | 128 MB standard/256 MB optional 100 MB/228 MB available to user applications                           | 1128 MB standard/256 MB optional 100 MB/228 MB available to user applications                          |
| FLASH Memory                       | 4 MB (0 MB available for user applications)   | 32 MB standard/128 MB optional 16 MB/112 MB available for user applications                            | 32 MB standard/128 MB optional 16 MB/112 MB available for user applications                            |
| Solid-State Hard Drive             | Not available   | Optional 8, 16 or 64 GByte drives available  | Optional 8, 16 or 64 GByte drives available  |
| SD Card Interface*                 | SD cards up to 32 GByte (8 GByte included)*   | SD cards up to 32 GByte (8 GByte included)*  | SD cards up to 32 GByte (8 GByte included)*  |
| USB Drive Interface                | n/a   | Standard USB 2.0 port  | Standard USB 2.0 port  |
| <b>Physical Dimensions</b>         |   |  |  |
| 1 I/O slot                         |   | UEIOPCUA 100-1G: 4.1" W x 4.0" D x 2.7" H  |  |
| 3 I/O slots                        | UEIOPCUA 300: 4.1" W x 4.0" D x 4.0" H  | UEIOPCUA 300-1G: 4.1" W x 5.0" D x 4.0" H  | n/a  |
| 4 I/O slots                        |   |  | UEIOPC-UA 400R: 16" W x 7.8" D x 1.75" H (Std 1U)  |
| 6 I/O slots                        | UEIOPCUA 600: 4.1" W x 4.0" D x 5.8" H  | UEIOPCUA 600-1G: 4.1" W x 5.0" D x 5.8" H  | UEIOPC-UA 600R: 10.5" W x 5.25" D x 6.2" H (Std 3U)  |
| 7 I/O slots                        | UEIOPCUA 700: 4.1" W x 4.0" D x 6.6" H  | UEIOPCUA 700-1G: 4.1" x 5.0" x 6.6"  |  |
| 12 I/O slots                       | n/a   | n/a  | UEIOPC-UA 1200R: 17.5" W 5.25" D x 6.2" H (Std 3U)   |
| <b>Environmental</b>               |   |  |  |
| Electrical Isolation               | 350 Vrms  | 350 Vrms   | 350 Vrms   |
| Temperature (operating)            | -40 °C to 85 °C   | -40 °C to 70 °C  | -40 °C to 70 °C  |
| Temperature (storage)              | -40 °C to 100 °C  | -40 °C to 85 °C  | -40 °C to 85 °C  |
| Humidity                           | 0 to 95%, non-condensing  | 0 to 95%, non-condensing   | 0 to 95%, non-condensing   |
| Vibration                          |   |  |  |
| (IEC 60068-2-64)                   | 10–500 Hz, 5 g (rms), Broad-band random   | 10–500 Hz, 3 g (rms), Broad-band random  | 10–500 Hz, 3 g (rms), Broad-band random  |
| (IEC 60068-2-6)                    | 10–500 Hz, 5 g, Sinusoidal  | 10–500 Hz, 3 g, Sinusoidal   | 10–500 Hz, 3 g, Sinusoidal   |
| Shock                              |   |  |  |
| (IEC 60068-2-27)                   | 50 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations | 100 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations | 100 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations |
| Altitude                           | 70,000 feet (special version to 120,000')   | 70,000 feet, maximum   | 70,000 feet, maximum   |
| <b>Power Requirements</b>          |   |  |  |
| Voltage                            | 9–36 VDC (115/220 VAC adaptor included)   | 9–36 VDC (115/220 VAC adaptor included)  | 9–36 VDC (115/220 VAC adaptor included)  |
| Power                              | 3.5 W (not including I/O boards)  | 7 W (not including I/O boards)   | 10 W (not including I/O boards)  |
| <b>Reliability</b>                 |   |  |  |
| MTBF                               | >300,000 hours  | >160,000 hours   | >130,000 / 160,000 hrs DNR-12 / DNR-6  |

\*The SD cards and SSD devices used are not built by UEI. As we do not control the source, we cannot offer our 10-year availability guarantee on these devices. SD and µSD cards are not available on MIL and BRICK chassis.

## UEIOPC-UA Technical Specifications:

| Computer Interface          |  | MIL series ruggedized chassis   |  |
|-----------------------------|--|---|--|
| Primary Ethernet Port       |  | 10/100/1000Base-T, 38999 connector  |  |
| Diagnostic Port             |  | 10/100/1000Base-T, 38999 connector  |  |
| Net Teaming/Bonding         |  | Supported   |  |
| Cnfiguration/Serial Port    |  | On LAN/COM 38999 connector  |  |
| USB Port                    |  | n/a on UEIOPC-UA  |  |
| I/O Board Support           |  |   |  |
| Series Supported            |  | DNA/DNR-series  |  |
| Software / Operating System |  |   |  |
| Embedded OS                 |  | Linux, kernel 4.4.89  |  |
| Real-time Support           |  | Standard Linux kernel   |  |
| Processor/system            |  |   |  |
| CPU                         |  | Freescall 8347 or 8347E, 400 MHz, 32-bit  |  |
| Memory                      |  | 256 MB, 228 MB available to user applications   |  |
| FLASH Memory                |  | 32 MB standard/128 MB optional<br>16 MB/112 MB available for user applications  |  |
| Solid-State Hard Drive      |  | *Optional 8, 16, or 64 GByte drives available   |  |
| Physical Dimensions         |  |   |  |
| 4 I/O Slots                 |  | UEIOPC-UA 400-MIL: 6.2" W x 7.1" D x 8.7" H, 11 lbs.  |  |
| 12 I/O Slots                |  | UEIOPC-UA 1200-MIL: 17.5" W x 8.1" D x 7.0" H, 22 lbs. (3U)   |  |
| Environmental               |  |   |  |
| Temperature (Operating)     |  | -40 °C to 85 °C (power dissipation of actual system may require derated maximum temperature)  |  |
| Temperature (Storage)       |  | -40 °C to 85 °C   |  |
| Humidity                    |  | 0 to 95%, non-condensing  |  |
| <b>Vibration</b>            |  | MIL-STD-810G plus the IEC specs below   |  |
| (IEC 60068-2-64)            |  | 10–500 Hz, g (rms), Broad-band random   |  |
| (IEC 60068-2-6)             |  | 10–500 Hz, 5 g, Sinusoidal  |  |
| <b>Shock</b>                |  | MIL-STD-810G plus the IEC specs below   |  |
| (IEC 60068-2-27)            |  | 100 g, 3 ms half sine, 18 shocks at 6 orientations;<br>30 g, 11 ms half sine, 18 shocks at 6 orientations   |  |
| Altitude                    |  | 70,000 feet, maximum  |  |
| EMI/RFI                     |  | Designed to meet MIL-STD-461  |  |
| Sealing                     |  | Default unit sealed to IP 66 or better. Pressure relief valves support continuous altitude changes of 5000 fpm. Units can be configured with bottom weep holes if desired |  |
| Power Requirements          |  |   |  |
| Voltage                     |  | 9–36 VDC designed to meet MIL-STD-1275/704  |  |
| Reliability                 |  |   |  |
| MTBF 1200-MIL               |  | > 100,000 hours   |  |
| MTBF 600-MIL                |  | > 130,000 hours   |  |
| MTBF 400-MIL                |  | > 130,000 hours   |  |

## UEIOPC-UA Advantages:

### Easy to configure and deploy

- Uses standard OPC-UA protocol
- Over 50 different I/O boards available
- Web browser based configuration
- Built-in signal conditioning
- Cube, RACKtangle and MIL configurations
- Standard "Off-the-shelf" products and delivery

### Flexible Connectivity

- 100Base-T or GigE with Cat-5 cable
- 10/100Base-FX Fiber interface available

### Compact Size: 4" W x 5.8" D x 4" H Cube allows:

- 175 analog inputs per cube
- 224 analog outputs per cube
- 336 digital I/O bits per cube
- 48 counter/timer channels per cube
- 48 quadrature encoder inputs per cube

### Low Power:

- As low as 15 W per chassis
- AC, 9–36 VDC or battery powered

### Rugged and Industrial:

- Operation tested from -40°C to 85°C
- Vibration tested to 5 g, (operating)
- Shock tested to 100 g (operating)
- All I/O isolated from chassis and host PC


Please refer to the ordering guide on the following page for information on options and part numbers.

## Ordering Guide: (All chassis include: Universal AC power supply, Serial and Ethernet cables.)

### Chassis Configuration

|                    |   |
|--------------------|---|
| 300 <sup>1,2</sup> | 100Base-T Linux-based, OPC-UA I/O chassis with 3 available I/O slots                    |
| 600 <sup>1,2</sup> | 100Base-T Linux-based, OPC-UA I/O chassis with 6 available I/O slots                    |
| 700 <sup>1</sup>   | 100Base-T Linux-based, OPC-UA I/O chassis with 7 available I/O slots                    |
| 100-1G             | Gigabit Ethernet, OPC-UA I/O chassis with 1 available I/O slots (a.k.a. UEINET-OPCUA)   |
| 300-1G             | Gigabit Ethernet, OPC-UA I/O chassis with 3 available I/O slots                         |
| 600-1G             | Gigabit Ethernet, OPC-UA I/O chassis with 6 available I/O slots                         |
| 700-1G             | Gigabit Ethernet, OPC-UA I/O chassis with 7 available I/O slots                         |
| 600R               | Gigabit Ethernet, OPC-UA I/O chassis, RACKtangle with 6 available I/O slots             |
| 1200R              | Gigabit Ethernet, OPC-UA I/O chassis, RACKtangle with 12 available I/O slots            |
| 400F-AC            | 1U FlatRACK, rack mountable 4 slot chassis with Gigabit Ethernet and 100-240 V AC power |
| 400F-DC            | 1U FlatRACK, rack mountable 4 slot chassis with Gigabit Ethernet and 9-36 VDC power     |
| 400-MIL            | Military style, 4 slot Cube with GigE Ethernet ports and 38999 connectivity             |
| 600-MIL            | Military style, 6 slot Cube with GigE Ethernet ports and 38999 connectivity             |
| 1200-MIL           | Military style, 12 slot RACKtangle with GigE Ethernet ports and 38999 connectivity      |

UEIPAC

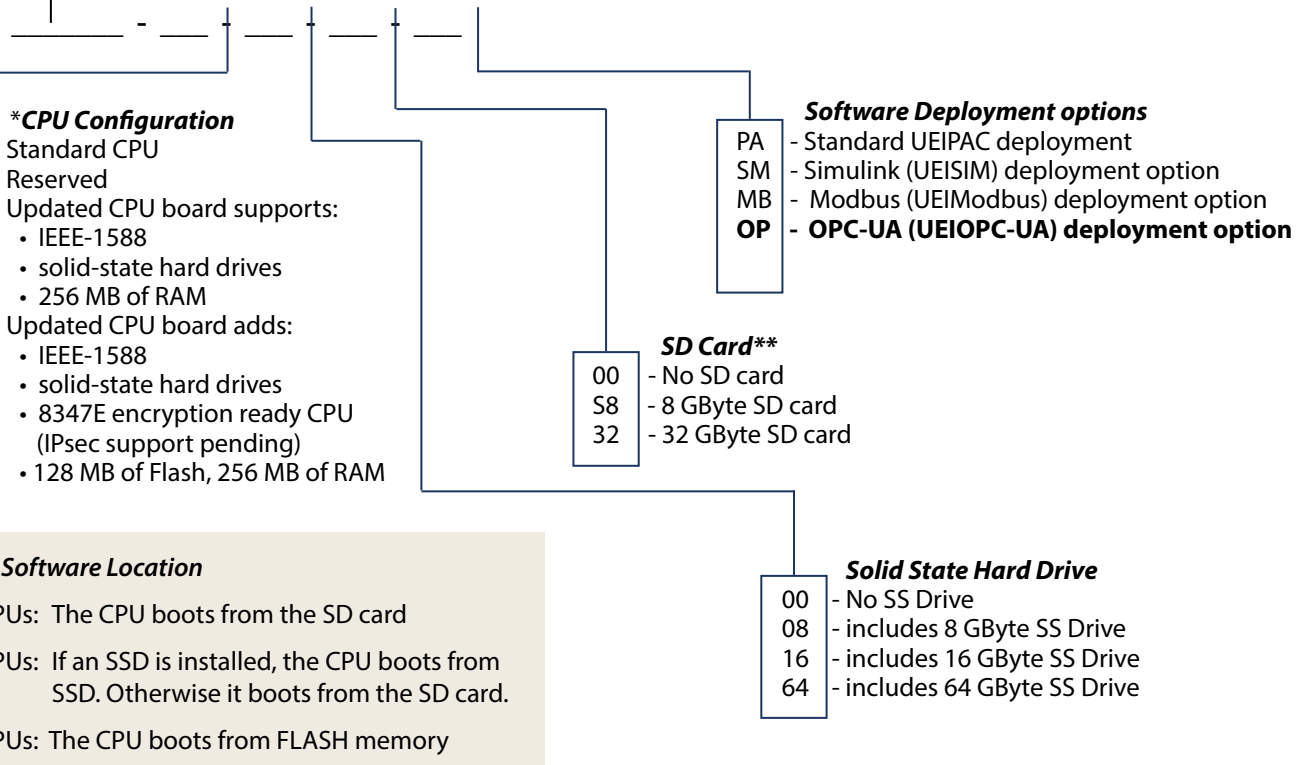

For example a 3-slot GigE OPC-UA Cube with 8347E encryption, no SS Drive, and no SD card would be:

UEIPAC 300-1G - 03 - 00 - 00 - OP

For example a 12-slot OPC-UA RACKtangle without 8347E encryption, a 8 GByte SS Drive, and no SD card would be:

UEIPAC 1200R - 02 - 08 - 00 - OP

<sup>1</sup> There are no CPU or Solid State Drive options available on the UEIOPC-UA 300, 600 and 700.

<sup>2</sup> The UEIOPC-UA 300/600 are available with 100Base-FX fiber connections or a DB-15 power connector. Contact UEI for details.

\*\*SD and uSD cards are not available on MIL and BRICK chassis.